


EIHF - ISOFROID

Funeral and Hospital Equipment
Embalming and Hygiene




2024

isofroid 

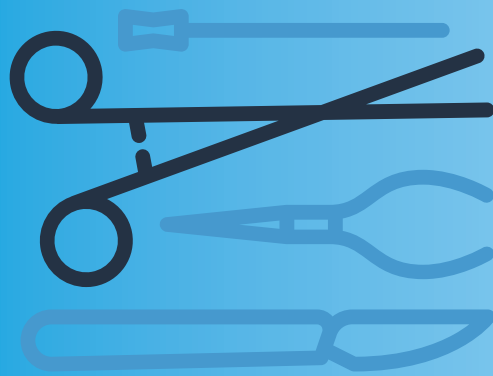

EMBALMING





FLUIDS



BALSAMOSEPTOL COND 2 - EMBALMING ARTERIAL FLUID

Embalming Arterial fluid Index 22, cardinal red colour, perfumed with essential oils of citronella. This fluid can be used in all cases by varying its concentration. It is used at a dilution of 225 to 250 ml per 5 litre jars. Normal cases, medium build, healthy and honest bodies, early treatment). It is advisable to reduce the concentration a little in all cases where jaundice is present.

In extreme cases, in a "catch-up" situation, it can be used in high concentration, and even pure. It is advisable to use slightly warm water if possible. Drain late and adopt a slow and continuous injection rate.

Approved by the Ministry of Health according to decree N° 76-435 of 25/07/1978 (J.D.25107/1978)

Réf. 210000 – Arterial Packing : Carton of 12 x 1 liter bottles.



BALSAMOSEPTOL COND 1 - EMBALMING ARTERIAL FLUID

Embalming Arterial fluid Index 26, cardinal red colour, perfumed with essential oils of citronella. This fluid can be used in all cases by varying its concentration. It is used at a dilution of 190 to 210 ml per 5-liter jar. See above advice as COND 2.

BALSAMOSEPTOL is characterized by a "late" action. Indeed, the fixation obtained is slow and gradual. Aesthetic quality and the final result depend on a natural "volumizing" of the features and attitude of the deceased BEFORE infection. After treatment, it can be seen that the fabrics are harmoniously and uniformly impregnated with the fluid and that they retain their suppleness and colour.

Approved by the Ministry of Health according to decree N° 76-435 of 25/07/1978 (J.D.25107/1978)

Réf. 210000/I26 – Artériel Packing : Carton of 12 x 1 liter bottles.



BALSAMOSEPTOL COND 3 - EMBALMING CAVITY FLUID

Embalming Fluid for Cavity application, colourless colour, and perfumed with essential oils of citronella. This Fluid is very powerful, and is intended to be spread in the thoraco-abdominal cavities by means of a trocar.

It is used pure, at a rate of 300 to 400ml in all cavities, in the "usual sensitive" regions.

It is advisable to increase the doses according to the "at risk" pathologies.

It is used with the cavity injector which is screwed directly into place of the cap.

Approved by the Ministry of Health according to decree N° 76-435 of 25/07/1978 (J.D.25107/1978).

Réf. 220000 – Cavity Packing : Carton of 12 x 1 liter bottles.




ART CAV SECURE - EMBALMING ARTERIAL FLUID FORMOL FREE

Embalming Arterial fluid (red), without Formaldehyde (active substance ADBAC/BKC (C12-C16), CAS 68424-85-1), cardinal red color, perfumed with essential oils. It is used after dilution in water (20% v/v) for injection into the arterial system. When applied according to the recommendations, a conservation treatment with this product ensures that the bodies are preserved for at least 5 days at room temperature.

The classification of the product is only Aquatic Chronic 3 (associated hazard statement: H412 Harmful to aquatic organisms, causes long-term effects). The product is not classified for hazards related to human health, approval of 14 February 2019 by the Ministry of Health (favorable opinion of the ANSES of 26/10/2018).

Réf. 240000 – Artériel Packing : Carton of 12 x 1 liter bottles.

Réf. 240000/C2 – Cavity Packing : Carton of 12 x 1 liter bottles.



SAMPLE VIAL

Allows the traceability of the fluid used in case of exhumation.

The ankle attachment of a vial containing a sample of the liquid used is carried out by the embalmer after the external washing of the body, asepsis of the orifices (mouth, nose, ears...) and before the end of the operation (before dressing, make-up and hairdressing).

Réf. 230000 Packing : Bag of 100 bottles with tap. Supplied with or without labels.



RECTIFIANT - NEUTRALIZED ADDITIVE

This transparent additive product mixes very well with all arterial fluids and in particular with **BALSAMOSEPTOL COND 2 Ref. 210000 and COND 1 Ref. 210000/i26**. This additive allows the correction of city water to improve the efficiency of the conservation fluid.

It also neutralizes the effects of excess chemicals in the body and the effects of hospital treatments, particularly "therapeutic chemo" treatments, which in particular activate the yellowing effects.

It works by stabilizing the pH of the water.

This product contributes to improving the efficiency of arterial fluid. It also helps to eliminate hypostases.

Réf. 320018 Packing : bottle of 1 liter
Carton of 12 bottle



METAFLUO - DRAINAGE ADDITIVE

This additive product to arterial fluids, in particular **BALSAMOSEPTOL COND 2 and COND 1 (Ref. 210000 and 210000/i26)**, is based on PLASDOFORM.

This additive is designed to improve drainage. It helps to dissolve clots in difficult cases. It facilitates the neutralization of the toxic effects of drugs and drugs.

It helps to eliminate post-mortem discolouration and swelling by facilitating drainage.

This additive is used in the same proportions as arterial fluid (one to one) without risking overdose.

Réf. 340080 Packing : bottle of 1 liter
Carton of 12 bottle



EDEMACO - OEDEMA ADDITIVE

This additive is specially designed for oedema cases. It fights tissue swelling.


In cases of significant tissue oedema, the slightest drop of water in the arterial fluid will make it even harder for the practitioner to fight this phenomenon.

For this reason, it is strongly recommended to clamp the 2 carotids, thus limiting dehydration of the head if not necessary, to be able to treat the body separately.

With EDEMACO you will be able to concentrate your arterial fluid type **BALSAMOSEPTOL COND 1 and COND 2** more significantly, thus reducing the water supply. Use with caution depending on the case.

Réf. 506005 Packing : bottle of 1 liter
Carton of 12 bottle





CO-INJECTION



RESTORATIVE - DEHYDRATION ADDITIVE

This additive product fights against tissue dehydration.

Its components have the ability to transport moisture and humectant directly into dehydrated cells.

The components are of biological nature with plant extracts.

It is used either in addition to all arterial fluids and in particular with **BALSAMOSEPTOL COND 2 (Ref. 210000)** and **COND 1 (Ref. 210000/i26)**, or as a direct application on the skin (usually on the eyes and lips) using a well soaked cotton.

Réf. 360022 Packing : bottle of 1 liter
Carton of 12 bottle



PROFLOW - LUBRICATION ADDITIVE

It is a Co-injectant: it considerably increases lubrication in the vessels. It provides good results under variable pH and water hardness conditions. It facilitates the penetration of the arterial solution into the tissues. The recommended use is 125ml per litre of injected solution. It provides excellent performance in emaciated and medicated bodies. Fully compatible with BALSAMOSEPTOL arterial fluids.

It includes high performance wetting agents, and humectant for optimal flow, infusion and colour distribution.

Contains no oil, silicone, lanolin or other obsolete raw materials. Contains no formaldehyde, phenol or highly flammable toxic ingredients. On "medicalized" bodies Before the treatment, pre-inject 4 litres (500ml of PROFLOW) to clean the tissues.

Réf. 107031 Packing : bottle of 1 liter
Carton of 12 bottle



HALT GX - CO-INJECTANT STOP "GAS TISSUE"

It is a Co-injectant that stops the production of gas. The "gas tissue" is classified as an "extreme" conservation treatment, hence the reason for the "X". It is used with arterial fluid at a rate of 120ml /litre injected, in case of: sign of advanced decomposition, death by drowning, injury to the abdominal area, signs of distension or crackling in the skin, "boiling" visible during drainage or swelling of the veins, formation of gas tissue, abdominal surgery susceptible to infection.

It is effective when injected "hypodermically" into the tissue, compatible with all preservative fluids and electric pumps, effective immediately during preservation care, inhibiting gas production.

Contains neither formaldehyde nor phenol: the only co-injectant, tested on the market with 100% effectiveness in inhibiting gas tissues.

Réf. 505075 Packing : bottle of 1 liter
Carton of 12 bottle




ICTERINE - DYE ADDITIVE FOR ARTERIAL FLUID

This additive product is recommended for the treatment of jaundice, jaundice, hepatitis. This dye is highly concentrated and should be mixed with all arterial fluids, especially with BALSAMOSEPTOL. It is available in 3 different colours to match the skin colour closest to the deceased. Its dosage is left to the embalming people's choice but it is advisable to start with a cap. It is recommended to check when injecting the 1st jar that the product will diffuse well into the tissues in order to avoid stains. If necessary, the concentration of arterial fluid should be reduced and injected again: do not hesitate to impregnate the tissues significantly.

Réf. 552026 Couleur Regular – Packing : bottle of 473 ml.

Réf. 552075 Couleur Peach – Packing : bottle of 473 ml.

Réf. 552117 Couleur Suntan – Packing : bottle of 473 ml.



DIS-SPRAY - DISINFECTANT AND DEODORANT

It penetrates the surface of dirty skin and the fat barrier naturally produced by the body. Can be used when leaving the body before handling, but also on sheets. Also used on all visible lesions such as open cancerous wounds, bedsores or eczema. Applied to cotton, it is ideal for disinfecting the parts that are sensitive to decomposition and most visible to the family when the deceased is presented, such as the nose, mouth, ears and eyes. It is composed of a product that fights fungi and moulds. When a body shows obvious signs of tissue gas, the product can be injected as an additive with arterial fluids, particularly with BALSAMOSEPTOL. This will stop the process.

Réf. 505068 Packing : bottle of 1 liter
Carton of 12 bottle

Réf. 703935 Spray for 1L bottle of Dis-spray.



BASIC DRYENE - CAUTERIZER

This product is a cauterizer of tissues. It is ideal for treating damaged areas of the skin, it dries and strongly whitens tissues: ideal for open wounds, burns, bedsores, ulcers, gangrene, and autopsied bodies. Can also be used as cavity fluid in the case of gas tissue formation, can be used with or without the cavity fluid BALSAMOSEPTOL: in this case injected instead of or with, for the treatment of tissue gases. It can also be injected directly into the brain to stop the process of gas tissue. It is recommended to use this product for repatriation by air. It can also be used in hypodermic injection to stop putrefaction. For optimal safety, cover with plastic so as not to inhale the vapours; It is also advisable to protect the skin around the area to be treated.

Réf. 515032 Packing : bottle of 1 liter
Carton of 12 bottle



DRYENE II - CAUTERIZER PHENOL FREE

This product is phenol-free. It's a tissue cauterizer. It dries and whitens tissues: ideal for open wounds, burns, bedsores, ulcers, gangrene, and autopsied bodies. It has the same characteristics as the BASIC DRYENE. It can also be used in hypodermic injection to stop putrefaction.

Réf. 515042 Packing : bottle of 1 liter
Carton of 12 bottle




DRYENE II - GEL CAUTERIZER PHENOL FREE

This is the new generation of cauterization and bleaching products from DODGE Co. Derived from standard osmotic formaldehyde gels, it does not contain phenol, it can be used by the embalming people without exposure to formaldehyde or the omnipresent odour of phenol. Its thicker and improved consistency allows it to stay in contact with the affected tissue, providing better penetration and cauterization. This product can be used in the following cases: it allows effective cauterization, bleaches the skin, even in bruised areas, and has very good penetration.

Réf. 515051 Packing : Pot of 350 g.





BODY RESTORATION



FEATURE BUILDER - FACIAL RESTAURATOR

This translucent gel is used with a syringe for facial restoration on very thinned bodies (following illness or severe dehydration): dilute it with solvent to thoroughly clean the syringe and needle after each use (necessary so as not to block the material). It fills the hollow spaces, by hypodermic injection, just under the skin. The results are spectacular because it allows to find the initial face: exists in 2 versions (is used in the same way for all 2). It is used to replenish very thinned tissues, to close the hole left by infusions or blood tests: it is injected directly into the hole, just under the skin, and stops the flow of blood.

At the level of the face, it is used for the contour of the eyes, lips, cheeks, temples and cavities under the jaws. The remodelling of the part to be re-inflated will be done gradually with the injection, allowing the product to be well distributed and evened out over the entire treated part.

BUILDER FIRMING FEATURE is most often used when certain parts of the face, in addition to being thinned, have not received enough arterial fluid: the action of formaldehyde makes the treated area firmer.

Paired with the solvent to clean the syringe and needle after each use so as not to clog the material.

Réf. 507013 Regular Packing : Jar of 110 ml

Réf. 507078 Firming Packing : Jar of 110 ml

Réf. 507130 Solvent Packing : Jar of 110 ml



SYNGEL HV - GEL FOR DAMAGED BODY PARTS

It is used on damaged body parts, recommended for putrefaction, pressure ulcers, ulcers, recent amputations, and even skin grafts. It is also used for autopsied bodies.

It must be applied with a cotton pad or a compress directly on the parts to be treated. Cover with plastic film after application.

Réf. 509101 SYNGEL HV – Packing : Pot of 440 g

Réf. 509102 SYNGEL HV – Packing : Pot of 1 kg



INR SEEL - PUTTY TO FILL INCISIONS

A flesh-coloured putty, it can be used on the surface or at depth, and is used to fill incisions and stop seepage. It is also used to reshape shapes. Be careful not to expose it to the air because it makes it fragile. When applied on the surface, to avoid this, it must be used with PORE CLOSER or PERMA SEEL to avoid dehydration. Apply in depth, it allows you to fill in holes and slots.

Ref. 555011 Powder – Packing : Pot of 500 Gr

Ref. 703602 Injector INR SEEL – It has 2 interchangeable nozzles and a cap that is screwed on at the end, the control screw ensures the flow rate. It is easy to clean: unscrews completely.




PORE CLOSER - SURFACE GLUE TO RECREATE A 2ND SKIN

Essential, this surface glue recreates a second skin to allow make-up to be applied over it. It is necessary in case of application of INR SEEL or wax, to cover them in order to be able to apply something else over them, thus avoiding any problem of flow or other. It dries very quickly and is very easy to use.

The thickness of its layer is thinner than PERMA - SEEL. It is therefore advisable to use it for precision work on the face or to hide an incision. It is ideal for sealing lacerations, scars, burns, bedsores, recent amputations and also incisions.

Réf. 525261 Packing : Jar of 360 ml - Included an applicator brush



PERMA SEEL

It is used before the final finishing phase to ensure that nothing will interfere or leak before applying make-up. Same characteristic as the PORE - CLOSER, it forms a thicker layer, it is also more elastic making it ideal for facial restoration work before transporting the body. It adheres strongly to tissues. Used for bedsores or amputations, it dries very quickly and appears to be essential for embalming treatments.

Réf. 525295 PERMA SEEL spray – Packing : Spray 200 ml

Réf. 525303 PERMA SEEL liquid – Packing : Jar of 360 ml - Included with the bottle is an applicator brush

Réf. 525404 PERMA SEEL solvent – Packing : Jar of 380 ml



QS - POWDER FOR INCISION TO AVOID SPILLS

Powder to be applied in incisions, ideal to avoid spills, it is recommended for all types of incisions, for autopsied bodies as well as for orifices and open wounds. With its pouring spout that allows it to be stored for a long time, it is easy to use and avoids dust dispersion. The QS powder contains a deodorant.

Réf. 560111 Incision Powder QS 500 g – Packing : Jar of 500 Gr

Réf. 560140 Incision Powder QS 3 500 g – Packing : Jar of 3 500 Gr



GLUE CYANOLIT 240

This glue is generally used to glue the eyelids of the eyes to the eye patch, the lips of the mouth and the incisions.

Réf. 920156 Packing : Jar of 20 ml



KALIP - SMOTHING CREAM

It is used on the delicate tissues of the eyes, lips and nostrils: smoothest unsightly wrinkles and folds in place, maintains the separation of the lips when the mouth is closed, and thus fills the tiny separation that can occur between the lips and also small cracks on a lip. The cream is slightly coloured and contains an adhesive base. Its texture is thick enough to be able to maintain the flesh on which the cream is used without waiting for the stiffness of the tissues. The cream prevents tissue dehydration. It is advisable to use the cream by heating it in your hands beforehand. The cream can be mixed with lip make-up: apply it then with a brush. It can also be used as a lip wax.

Réf. 680021 – Packing : Pot of 60

Réf. 680026 – Packing : Pot of 440 g



EASYWAY - MAKING A SECOND SKIN

It is easy to apply: does not contain wax.


It reduces the "imperfections" of the skin, acting as a "second skin".

You can apply any cosmetic on it.

Ref. 531400 - The EasyWay kit: composed of 110gr of powder, 110ml of liquid, paper cups to prepare the mixture, a spatula and instructions for use.

Réf. 531400 Packing : By kit





INSTRUMENTS



ANEURYSM HOOK

Stainless-Steel

Without eye

Réf. 703338 Packing : By unit

With eye

Réf. 703339 Packing : By unit



DOUBLE ENDED SEPARATOR

Used for all standard dissection procedures – Large Model Separator – Length of 16 cm - Stainless-Steel

Réf. 705701 Packing : By unit



MAC-DONALD FINE SEPARATOR

Used for raising delicate arteries and veins dissection procedures – Length of 18,5 cm – Stainless-Steel

Réf. 705705 Packing : By unit



GROOVED VEIN DIRECTOR

Grooved fascia needle - Length 13,8 cm - Stainless-Steel

Réf. 702209 Packing : By unit



DISSECTING FORCEPS

Stainless-Steel, Ideal for delicate dissection and reconstruction work. Fine point is perfect for locating delicate facial arteries when embalming autopsy cases.

Packing : By unit


Réf. 702670 Length of 30,5 cm

Réf. 702688 Length of 25 cm

Réf. 702696 Length of 20 cm

Réf. 702700 Length of 15 cm

Réf. 702720 Length of 12,5 cm

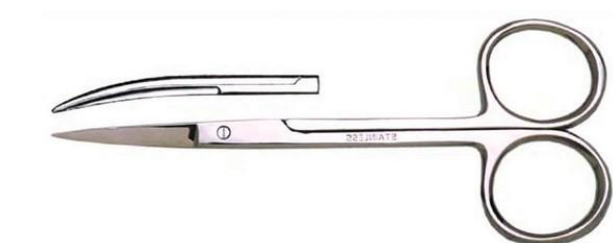

SHARP POINT SCISSORS

Length of 12,5 cm - Stainless-Steel

Réf. 704711 Packing : By unit

Length of 15 cm - Stainless-Steel

Réf. 704721 Packing : By unit

Curved - Length of 15 cm - Stainless-Steel

Réf. 704619 Packing : By unit




CURVED SHARP POINT SCISSORS

Length of 12,5 cm - Stainless-Steel

Réf. 704653 Packing : By unit

Length of 15 cm - Stainless-Steel

Réf. 704671 Packing : By unit



SPENCER WELLS FORCEPS

Straight Stainless-Steel

Réf. 702830 Length of : 12,5 cm

Réf. 702831 Length of : 15 cm

Réf. 702832 Length of : 18 cm

Curved Stainless-Steel

Réf. 702846 Length of : 18 cm



MAC INDOW FORCEPS

Stainless-Steel : Fine

Réf. 702781 Length of : 15 cm



MOSQUITO FORCEPS

Curved Stainless-Steel

Réf. 702878 Length of : 12,5 cm

Straight Stainless-Steel

Réf. 702879 Length of : 12,5 cm



RETRACTOR ADJUSTABLE

Ideal for holding incisions open when working in restricted areas. Helps to prevent incisions becoming over stretched while dissection is performed

Stainless-Steel

Réf. 703978 Packing : By unit



RETRACTOR FOR VEIN

Stainless-Steel

Réf. 702571 Length of 27 cm Packing : By unit

Réf. 702589 Length of 17 cm Packing : By unit



SPRING RETRACTOR

Allows to improve visibility when searching for arteries or vessels

Stainless-Steel

Réf. 703967 Length of 13,5 cm Packing : By unit




DRAINAGE FORCEPS

Practical drainage simulator, particularly useful in the removal of heavy, clotted blood. Expands the vein to maximum diameter, yet takes up little space within the vessel itself.

Réf. 702837 Length of 24 cm Packing : By unit





INSTRUMENTS



INCISION CLIP

Small and practical clip for long incisions. Ideal for holding the skin flaps together when suturing the incisions of post mortem cases. Ensures both incision edges match before suturing is carried out. Length of 9 cm

Réf. 702905 Packing : By unit



GATHERING FORCEPS

Ideal for holding together the edges of long incisions. Length 13.5 cm

Réf. 702902 Packing : By unit



INCISION CLAMP DIEFFENBACH

The clamp holds the incision during sewing. Ideal for holding the edges of incisions together while suturing. - Length of 10.5 cm

Réf. 702614 Packing : By unit



NEEDLE HOLDER

Stainless steel : Can be used with needles

Réf. 702936 Packing : By unit



STRAIGHT SUTURE NEEDLES

Stainless steel

Réf. 704276 Length of 7.62 cm Pack of 12

Réf. 704273 Length of 10.16 cm Pack of 12

Réf. 704271 Length of 13.97 cm Pack of 12

Simple extra fine, eye suture

Réf. 704137 Length of 3.81 cm Pack of 12

Réf. 704132 Length of 6.35 cm Pack of 12



SERPENTINE SUTURE NEEDLES

Stainless steel

Réf. 704295 Length of 8.25 cm Pack of 12

Réf. 704293 Length of 10.80 cm Pack of 12

Réf. 704291 Length of 13.34 cm Pack of 12



CURVED SUTURE NEEDLES


FINE CURVED NEEDLES - Stainless steel

Réf. 704230 Length of 7.62 cm Pack of 12

Réf. 704235 Length of 10.16 cm Pack of 12

POST-MORTEM- Stainless steel

Réf. 704241 Length of 10.16 cm Pack of 12



INSTRUMENTS

LIGATURE CORD

Ligature cord for Autopsy - Linen unbleached - Spool of 250 g

Réf. 761650 Packing: By unit

Fine Ligature cord - 100% Linen - Coil of 250 g

Réf. 761620 Packing: By unit

Fine Ligature cord - 100% Linen - Coil of 50 g

Réf. 761610 Packing: By unit

Extra fine ligature wire - Nylon - Coil of real 60m

Réf. 761670 Packing: By unit



HYPODERMIC NYLON SYRINGUE

For hypodermic injection: to be used with hypodermic needles.
Capacity 20 ml

Réf. 705110 Packing: By unit



HYPODERMIC NEEDLE LUER

Hypodermic injection allows the preservation of tissues not injected by the arterial tract.

Réf. 705130 Length of 5 cm Packing: By unit

Réf. 705135 Length of 8 cm Packing: By unit

Réf. 705140 Length of 10 cm Packing: By unit



BLADE

Réf. 701468 Middle Size - By Box of 100 - N° 22

Packing: By unit



SCALPEL HANDLE

Réf. 703174 (Blade not included with **Réf. 701468**)

Packing: By unit



DISPOSABLE SCALPEL

Réf. 703175 By Box of 10 - N° 22

Packing: By unit



RECUPERATOR FOR NEEDLES OR BLADES


NEEDLES RECUPERATOR

Réf. 502118 Packing: By unit

NEEDLES, BLADES AND BISTOURI RECUPERATOR

Réf. 502119 Packing: By unit





INSTRUMENTS



FIXATION FORCEPS

Stainless-Steel: Used to hold the cannulas at the ligature level
4 different models. Packing : By unit.

2 holes

Réf. 702564 Large Size - Ø 6 et 4,5 mm

Réf. 702565 Middle Size - Ø 4 et 3 mm

Réf. 702566 Small Size - Ø 2 et 1,5 mm

3 holes

Réf. 702894



ARTERIAL INJECTION TUBES

With taper fit, the tubes are used with a metal adapter for greater safety, allowing injection at higher pressure without risk.
The nozzle is attached to the injection hose. The cannula turns inside to be held. The reverse movement allows the cannula to be removed. This makes tube change quick and easy.

Curved

Ref. 707725 By Unit – Carotid Length of 6 mm

Ref. 707726 By Unit – Large Length of 5 mm

Ref. 707727 By Unit – Medium Length of 4 mm

Ref. 707728 By Unit – Small Length of 3 mm

Straight

Ref. 707729 Large Straight Arterial Tube

Ref. 707730 Medium Straight Arterial Tube

Ref. 707731 Small Straight Arterial Tube

Ref. 707732 Baby Straight Arterial Tube

Ref. 707733 Maxillary Straight Arterial Tube



ADAPTATOR AND TAPER

Female Taper Socket

Réf. 707735 Packing : By unit

Male Taper Socket

Réf. 707736 Packing : By unit

Male Taper Plug

Réf. 707737 Packing : By unit



« Y » TUBES

The « Y » tube is used for the simultaneous injection of 2 arteries
Made of chromed brass


Réf. 709312 Packing : By unit



THILLEY'S NASAL FORCEPS

Stainless-Steel : Very useful for delicate packing procedures around the nose, mouth and even ears.

Réf. 702940 – Length of 15 cm Packing : By unit



VEIN DRAINAGE TUBES

Usually used for jugular veins, these tubes connect directly to your suction tube for perfect work.

Ref. 707414 Large Jugular Packing : By unit

Ref. 707422 Medium Jugular Packing : By unit

Ref. 707430 Small Jugular Packing : By unit



CAVITY NON CLOGGING ASPIRATOR

This chrome-plated unit has been completely redesigned with a removable chamfered filter head and hexagonal multidiameter tubing mount.

Réf. 701174 Packing : By unit



METAL STOP-TAPE CONNECTOR

Placed between the injection jar and the arterial tube, it allows the control of the injection. Used to control the flow of fluid from the injection equipment, this connector features ball operation to ensure no leakage from the connector when the tap is closed.

Réf. 704860 Packing : By unit



THROAT / NASAL ASPIRATOR TUBE

This tube is necessary for the nose, mouth and throat. It is equipped with a removable tip for easy cleaning.

Réf. 708810 Packing : By unit



CAVITY INJECTOR

For rapid injection of cavity fluid. The flow rate is controlled with a finger on the air intake opening. The hose connects directly or via a female adapter with a connected hose.

Réf. 703578 Packing : By unit




CAVITY INJECTOR WITH TRIGGER

New cavity injector: For rapid injection of cavity fluid and one-handed injection: Quick bottle attachment for easy bottle insertion and removal, includes a 5/16" x 18" stainless steel trocar and a 7" chemical cavity injector

Réf. 703420 Packing : By unit





INSTRUMENTS



TUBING RATCHET CLIP

Réf. 704870 PVC material Packing: By unit

TROCARS (PUNCTURE TUBES)

Trocars (puncture tubes) are supplied with caps and tips and are manufactured to the highest standards. There are 5 sizes available as well as a baby trocar which is also supplied with a cap and tip.
Packing : By unit

Réf. 706095 Length of 56 cm - with stainless steel tip and tip guard.

Réf. 706092 Length of 46 cm - with stainless steel tip and tip guard.

Réf. 706082 Length of 41 cm - with stainless steel tip and tip guard.

Réf. 706072 Length of 36 cm - with stainless steel tip and tip guard.

Réf. 706015 Length of 16 cm - Baby trocard with stainless steel tip and tip guard.

TROCAR CLEANING SET AND SPARE

BRUSHES

Trocar cleaning set with 2 nylon and bronze brushes, plus 1 rod with threaded tip for screwing the brushes, and an extension for large models

Réf. 706099 Packing : By unit

Réf. 706100 Spare brush Nylon Packing : By unit

Réf. 706110 Spare brush Bronze Packing : By unit

POINT CAP

Tip guard for trocar (puncture tube)

Réf. 706071 Packing : By unit

SPARE TROCAR POINT


Spare trocar point for trocar (puncture tube)

Réf. 706096 Packing : By unit

CHUCK ACTION TROCAR HANDLE

The handle fits on most puncture tubes; it is ideal for a good hold of the tube and provides great comfort of use

Réf. 706098 Packing : By unit



DISPOSABLE ASPIRATION BAG

The bag is used to recover body fluids (blood, urine, etc. following drainage). It is positioned in the receptacle. The assembly thus composed allows on one side (output) to connect the pump (manual or electric) via a tube to form the vacuum in the receptacle, and on the other side (input) to connect the trocar via a tube. Once the bag is filled, the bag is closed with its cap, removed from the receptacle and disposed of in a DASRI container provided for this purpose (for incineration). If the drainage is not completed then repeat the operation with a 2nd pocket.

Packing : case of 144 bags.

Réf. 705520 Capacity of 3 litres (available in stock)

Réf. 705522 Capacity of 2 litres (on request)

Réf. 705526 Capacity of 1 litre (on request)



RECEPTACLE

Réf. 705523 – Capacity of 2 litres (to use with bag **Réf. 705522**)

Réf. 705521 – Capacity of 3 litres (to use with bag **Réf. 705520**)

1 : Empty – 2 : fixation – 3 : Scale measurement – 4 : Robust structure – 5 : shape



WALL MOUNTING FOR RECEPTACLE

Réf. 705525 – Allows the receptacle to be held on the wall

DISPOSABLE ASPIRATION BOOTLE

Disposable aspiration Bootle : made of transparent plastic with a 3-litre scale. For single use only

Réf. 705500 Packing : case of 40 bootles.



COMPLETE INJECTION BOOTLE

The new Injection Jar: made of plastic, it has a robust base, a screw cap to facilitate its filling, 2 pipes: one for injection, and the other for drainage, a stop valve, a non-return valve, and a manual pump and a pressure gauge to control the pressure in the jar.


Réf. 705544 – Capacity of 5 litres – By Unit.

Réf. 705545 – Capacity of 10 litres – By Unit.

A sturdy base ensures that the jar does not tip when empty or full, and the screw cap makes it easy to fill chemicals or water without spills or leaks. The jar is also equipped with

- a chemical-resistant 14H injection and drainage hose and a shut-off valve.
- a check valve ensures that no liquid can enter the motor pump, even if the tank is too full.
- a manual pump and a pressure gauge so that the pressure tank can be used with or without an electric pump.





INSTRUMENTS



TUBING WITH CONNECTOR

Réf. 761995 Semi flexible - Φ 7 mm - Sold by roll of 30,60 m - 17 pieces of 1.80 m to be cut



TUYAU PORTEX

Réf. 761980 Vinyl 14 HE - Φ 7 mm - Sold by the meter



BULBE SERINGE FOR INJECTION

This rubber bulb is supplied with 2 valves without filter base, used for injecting fluids into arteries or cavities or for decanting liquid from large containers to small ones

Réf. 705404 Packing : By unit



MEMBRANE PUMP FOR SUCTION

Membrane pump for suction : Electric, with or without a monomer.

Réf. 705002 Packing : By unit



MANUAL PUMP

Built in chrome-plated brass, this hand pump can be used to pressurize the injection jar or create a vacuum for the jar or receptacle with suction bag. A valuable backup solution in the event of power outages or mechanical failures with electric pumps.

Réf. 703780 Packing : By unit



ELECTRICAL PUMP

Injection or suction, with a monomer.
Standard single motor portable standard pump.
Allows injection or suction.

Dimension 20 x 20 x 18 cm. Weight 3,35 Kg.


Réf. 709406 Packing : By unit



Injection and/or suction, with a monomer.
Standard dual motor portable standard pump.
Allows simultaneous injection and suction.

Dimension 23 x 27 x 18 cm. Weight 5Kg.

Réf. 709411 Packing : By unit



EMBALMING MACHINE WITH INTEGRATED TANK AND INJECTION PRESSURE CONTROL

11.36 liters tank for injection mixing with tank filling gauge.
The injection is carried out at low pressure in normal work and possibility of injection at high pressure in case of suspected blockage and thus avoid them.

Included Flow meter, pressure gauge, choice between continuous or discontinuous flow (pulsation) for injection, flow adjustment, indicator light, rubber feet, removable stainless steel tank cover, quick release injection tube: Easy to detach, drain, wind and store in the product tank or use the clamp located at the front of the machine, a fully stainless steel housing with 2 side handles to facilitate installation, side bracket for hose storage, magnetic transmission pump.

The automatic cycle mixes the solution without even having to attach the hose. The recessed transport handles make it easier to move the machine. The flexible hose is complete with adapter and shut-off valve for threaded arterial tubes or luer-lock. The Tube Holder Cleats are practical (on the side of the machine).

Ref. 924201 Automatic adjustment of the injection pressure

Dimension 43 x 48 x 36cm (L x D x H)

Ref. 924001 Manual adjustment of the injection pressure

Dimension 43 x 48 x 36cm (L x D x H)





HIGHT PRESSURE "Y" ASSEMBLY KIT FOR EMBALMING MACHINE

Packing : By kit

Réf. 924329 for the Kit: Included for each kit "Y": (spare parts are available individually)

1. **Ref. 709309** A male "Y" with male thread
2. **Ref. 924430** Two shut-off valves for high-pressure "Y" injector
3. **Ref. 701055** Four double male threaded adapters
4. **Ref. 924323** Two 12" Dodge Machine tubes for "Y" injector assembly
5. **Ref. 924325** Two quick couplings - Female for Dodge Machine
6. **Ref. 924326** Two quick couplings - Male for Dodge Machine

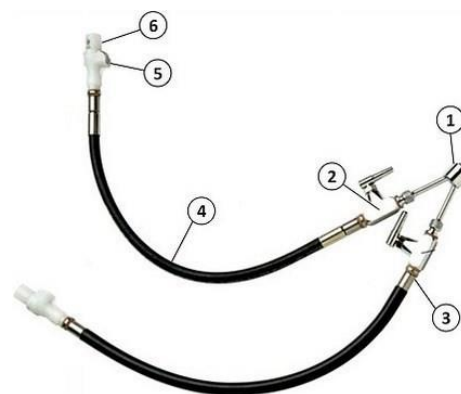



FINISHING PRODUCTS



ANTI-DEHYDRATION CREAM

Allows the skin to rehydrate. Restores elasticity and suppleness to the face. Can also be used on hands.

Réf. 680030 Jar of 60 g Packing : By unit
Réf. 680032 Jar of 440 g Packing : By unit



SILCOLAN

Lubricant used for the inside of hand pumps, for venous drainage tubes but also for the face, neck and hands as a replacement for massage cream, particularly for bodies stayed in a cooling cell. Its components give it a very fluid texture leaving the skin supple. This rehydrating product provides a better finish.

Réf. 619001 Packing : Spray 150ml



UNDERCOAT

Opaque makeup front scrub that creates an undercoat to hide certain discolorations or blemishes caused by wounds or bruises. Can be used on hands or face. Available in three different colors:

Réf. 691000 – Light - Spray 200ml
Réf. 691002 – Medium - Spray 200ml
Réf. 691001 – Dark - Spray 200ml



KALON MASSAGE CREAM

Allows the skin to rehydrate. Fluid and very rehydrating, it removes rigidity. Available in white for cosmetic massage, It has a good smell. Richly emollient, smooth, non-caking.

Réf. 910753 – Jar of 440 g.
Réf. 910754 – Jar of 1 kg.



COMPLEXION SPRAY

This translucent powder-free liquid cosmetic is to be used for a perfect finish with the liquid atomizer. Medium colour. Available in other colors, contact us

Réf. 690637 – Packing : Bottle of 110 ml



LIQUID ATOMISER

High quality liquid atomiser is perfect for the application of Dodge French Rose Tints and Complexion Sprays. Chrome metal spraying parts, clear glass jar and plastic sprays. Removable nozzle for thorough and easy cleaning.


Réf. 701300 Packing : By unit



LIP ROUGE - LIQUID

Lip product, liquid product very easy to use with its brush applicator, restores a natural look to the lips. Medium Colour

Réf. 690479 Packing : Bottle of 14 ml



RESTORATIVE PRODUCTS

SOFTOUCH - LIQUID COLORING POWDER FOR THE SKIN

Translucent liquid powder that exists in 3 different shades to restore a very natural coloration to the skin without covering the marks.

Before application, shake the bottle well on a compress.

Réf. 690147 Light fresh - Bottle of 110 ml

Réf. 690163 Suntan - Bottle of 110 ml

Réf. 690173 Brunette - Bottle of 110 ml



MODELLING WAX FLESH

Modelling Wax expressly created for use in restoration of facial features. Pliable, elastic consistency-moulds easily to form and hold its shape. Remains firm after moulding. Forms a smooth, receptive cosmetic base. Will not crack or draw.

Réf. 685400 Packing : Jar of 340 g



SURFACE RESTORER WAX

Formulated for maximum workability in treating surfacing, and re-contouring shallow wounds, superficial lesions, sores and shallow mutilations. Holds in soft and moist tissue. Adheres firmly and holds its form - yet remains flexible and workable. Cosmetically compatible available in complexion coordinated shades.

Réf. 685057 Coloris Pink - Jar of 50 g

Réf. 685081 Coloris Straw - Jar of 50 g



WAX SPATULAS

With its steel handle, it is used to apply restorative wax.

Lame flexible

Made of stainless steel.

Réf. 703918 Packing : By unit



KALON FINISHING POWDER

Cosmetic powder to be applied to the skin, for the last step, called finishing, to give a flesh tone, and, or an appropriate complexion.

Ref. 642800 White colour – Jar of 100 g.

Ref. 642860 Brunette colour – Jar of 100 g.

Ref. 642890 Suntan colour – Jar of 100 g.



ROSE FINISHING POWDER

Cosmetic powder to be applied to the skin, pink in colour.

Réf. 642955 Jar of 100 g




POWDER SPRAYER

The finishing powder sprayer is used with powders for a perfect finish. A squeeze of the bulb sends a gentle spurt of powder out of the nozzle. Gives precise control of coverage. See-through container base removes for easy filling. Helpful time saver.

Excellent when used with any of the finishing powders.

Réf. 703751 Packing : By unit





COSMETIC PRODUCTS



COSMETICS KITS DODGE

These products are easy to apply and have the advantage of combining a minimum of different colours to avoid the multiplicity of unnecessary cosmetics. These kits include everything you need to achieve a professional result, from a natural look without make-up to the most complex cases requiring opaque covering creams, while avoiding the "mask" effect.

Réf. 031731 6 in 1 Cover Cream Kit Light/Medium

Réf. 031735 Kit 6 medium/dark foundations

Réf. 031736 Kit 8 foundations + 4 lipsticks

Réf. 031740 6 colour complexion corrector kit



COSMETIC LIQUID PERMA

Liquid foundation, dries quickly, does not crack and has remarkable camouflage power. It is recommended to cleanse the face thoroughly with DRY WASH to remove any impurities, as well as the greasy film naturally secreted by the skin. Colours to be defined

Réf. 670018 Packing : Jar of 30 g



COMPLETE COSMETIC KIT

It includes the products listed below (one of each except 900100 which is in duplicate) : 900000 – 900051 – 900020 – 900021 – 900022 – 900023 – 900030 – 900032 – 900034 – 900040 – 900070.

Réf. 910188 Make-up Kit - Light Skin

Réf. 910191 Make-up Kit - Dark Skin



COSMETIC POWDER

This cosmetic is applied on the foundation to make the complexion more matt and ensures a good longevity to the make-up. Apply with a brush or puff. Ivory colour.

Réf. 900051 Packing : Jar of 20 g



LIQUID FONDATION FOR THE FACE

Its light and fluid texture allow a fast and uniform make-up. Ensures a satin and matt result, wonderfully luminous. For a perfect result, apply with the bevelled sponge. Capacity 30 ml.

Réf. 900020 Golden Beige (N°5) - By Unit

Réf. 900021 Pinkish Beige (N°6) - By Unit

Réf. 900022 Natural Halle (N°7) - By Unit


Réf. 900023 Golden Halle (N°8) - By Unit

Also available for black skin

Réf. 900020 Cinnamon (N°10) - By Unit

Réf. 900021 Brown (N°11) - By Unit

Réf. 900022 Ebony (N°12) - By Unit




ULTRA COVERING FOUNDATION

Réf. 900035 Natural beige (N°4) - By Unit

Réf. 900036 Golden beige (N°5) - By Unit

Réf. 900037 Pinkish beige (N°6) - By Unit

Réf. 900038 Halé naturel (N°7) - By Unit



COSMETIC PRODUCTS

FOUNDATION COMPACT POWDER

Creamy formula that gently fades for a perfect affinity with the skin. Skin imperfections are hidden.

Apply with a damp bevelled sponge.

Réf. 900030 Natural Beige – Jar 10 ml

Réf. 900032 Pink Beige – Jar 10 ml

Réf. 900034 Natural Halle – Jar 10 ml



PALETTE OF 6 CONCEALERS

Ideal for correcting skin imperfections. Choose the right colour or mix them to get as close as possible to the complexion to be corrected. This helps to hide pigment spots, small wounds, scars, burns.

To be applied with a brush.

Réf. 900040 Pallet 6 colours Light to medium of 6 creams of 2 g each

Réf. 900041 Pallet chromatic colours of 6 creams of 2 g each



PALLET OF 6 LIPSTICKS

Ideal to correct the imperfections of the lips, and to return them a uniform color. Choose the right color or mix them together to get as close as possible to the skin tone to be corrected.

Apply with a brush or finger.

Réf. 900070 Packing : By kit



BEVELLED SPONGE FOR COSMETICS

Facilitates the application of foundations. Allows high precision work for the eye, face and nose area. Ideal for an ultra-precise application of foundations on the most hard-to-reach areas of the face.

Wash regularly with very hot water and soap.

Réf. 900100 Dimension 6 x 4,5 x 3 cm. Packing : By unit



BRUSHES

Wash with hot water and soap.

Réf. 900096 Brush for powder (blush) to shape the face or colour the cheekbones.

Réf. 900098 Brush to apply the powder.

Réf. 900092 Brush for Eyelash comb.

Réf. 900094 Brush for Eyelid, bevelled.

Réf. 900090 Brush for lip with metal case.




EMPTY TRANSPARENT POCKET

Empty transparent pocket. Pocket for complete Make-up kits **Réf. 910188** et **910191**.

Réf. 910120 Conditionnement : à l'unité





CASES



SUITECASE LEATHER FOR EMBALMING

Black grained leather crust suitcase with handle including 1 tote pocket, a separation instrument tray and 1 instrument holder flap.

Closure by 2 straps.

Also available on wheels and telescopic handle.

Dimensions length 45 x width 25 x height 40

Réf. 910190 Leather injection/suction case without caster

Réf. 910290 Leather injection/suction case on wheels



SUITECASE DOUBLE DODGE

Two suitcases with drawers and storage for mortuary equipment. One with wheels and the other one without which is stacked on top of the one with wheels.

The lower suitcase is on wheels with a lift-up handle for easy transport.

Dimensions approximately length 45 cm x width 25 cm x height 40cm

Réf. 910178 The 2 cases are not sold separately



KIT FOR INSTRUMENTS

Made of high-quality fabric - Closes by rolling and closes with Velcro.

Dimensions open 34 x 25 cm x 2 cm, closed 12 cm x 25cm

Réf. 910194 (Empty without instruments)

MALLETTE EN SIMILICUIR

Imitation leather suitcase with 3 compartments for storage, one of which is on the side of the suitcase. A telescopic handle to carry and to carry 2 wheels and 2 feet.


Dimension length 45 x width 22 x height 34

Réf. 910185 Suitcase with 3 compartments on wheels in black - EMPTY



Réf. 910189 COMPLETE including

- 751345 Large model transparent eye cover,
- 505068 Dis-Spray, 1L bottle,
- 703935 Spray for 1L can,
- 680030 Rehydrating cream 60 gr
- 703338 DODGE Ship Hook Without Chas
- 705701 Large model separator,
- 704671 Dolphin scissors 15 cm,
- 702696 Normal dissection clamp 20 cm,
- 702831 Hemostatic clamp 15 cm,
- 704235 Curved needle 10 cm (by 6),
- 704273 Single straight needle 10 cm (par 6),
- 761610 Wire ligature 50 gr
- 900032 Compact foundation No. 91, pinkish beige
- 900051 Golden beige loose powder,
- 900098 Powder brush,
- 900100 Beveled sponge
- 750705 Cotton 250 gr
- 505300 Stainless steel instrument box
- 751656 T.7/8 powder-free nitrile gloves, the box of 100
- 910185 Empty briefcase on wheels with telescopic handle



CARE VARIOUS PRODUCTS

KALOFORM FORMALIN CREAM

The KALOFORM massage cream, emollient based on formaldehyde, allows the external preservation of areas not affected by arterial injection: easy to apply, by hand or with cotton, helps to treat "soft" areas, does not wrinkle the tissues.

Réf. 690116 Packing : Pot of 440g



DRY WASH II SHAMPOO

Used in shampoo, it makes hair clean and shiny, it allows to clean hair dry. It is applied in small quantities to cotton and evaporates naturally. Its action has no effect on dyes, perms or natural curls. It is a fast-drying degreaser, which removes stains and/or dried blood even from fabrics. It is also used to clean brushes, brushes and also to push back flies in summer (especially in the nostrils): excellent for fighting maggots. It is also effective in cleaning the face before applying cosmetics. Does not contain trichloroethylene.

Réf. 520072 Packing : Jar of 500 ml



NILAQUA SHAMPOO

This leave-in shampoo helps to keep hair fresh and clean without using water. This dry shampoo wipes hair like a conventional shampoo and cleanses without leaving any traces or sticky residues. This apple-smelling shampoo has a non-irritating formula and leaves hair soft. Paraben-free and pH balanced.

Réf. 521001 Packing : Jar of 200 ml

Réf. 521002 Packing : Jar of 500 ml



AQUA TOTAL HYGIENE TOILET GLOVES

Disposable, it is suitable for use without water, soap, rinsing or wiping. Pre-moistened with a hypoallergenic cleansing lotion, it is very practical and is now lined with a waterproof internal coating to protect the caregiver from any contamination.

Réf. 502200 Packing : bag of 12



AQUA SHAMPOO TOILET GLOVES

This product allows you to shampoo without water and without the need to rinse your hair. Ready to use and single use, this glove is suitable for all hair types.

Réf. 502250 Packing : bag of 12




VISCEROCK FF ABSORBENT POWDER

This new absorbent powder from Dodge Co, VISCEROCK FF is formaldehyde-free. It is almost dust-free, spreads easily and does not agglomerate in any environment where it is applied. VISCEROCK FF dries and stops all forms of moisture.

Powder widely used on autopsied bodies, applied directly to the viscera.

Réf. 535115 Packing : Seal of 2250 g





CARE VARIOUS PRODUCTS



HYDROPHILE COTON

Hydrophile Coton accordion

Réf. 750705 Hydrophile, pack of 250 g

Réf. 750706 Hydrophile, pack of 500 g



STETCH FILM

Stretch film to avoid spills, especially during oedema.

Réf. 750710 Stretch film width 125mm x length 150m x thickness 23µm

Option

Réf. 750711 The right handle - The unit



CLEAR PANTS FOR OEDEMA

Transparent waterproof trousers for the deceased.

Réf. 755473 Size S – By unit

Réf. 755464 Size M – By unit

Réf. 755455 Size L – By unit

Réf. 755482 Size XL – By unit



LEGGINGS FOR OEDEMA

Transparent waterproof leggings for deceased, the pair

Réf. 755573 Size S – By unit

Réf. 755564 Size M – By unit

Réf. 755555 Size L – By unit



CUFFS FOR OEDEMA

Transparent waterproof cuff for the deceased, one size fits all

Réf. 755962 The pair



COMBINATION FOR OEDEMA


Transparent dry suit for the deceased

Réf. 755774 Size S – By unit

Réf. 755765 Size M – By unit

Réf. 755756 Size L – By unit

Réf. 755783 Size XL – By unit



BODY PREPARATION

BOX FOR INSTRUMENTS STORAGE

Instruments or needles storage box

Réf. 505300 Dimensions 20 x 10 x 3 cm - Stainless steel

Réf. 505302 Dimensions 25 x 12 x 6 cm - Stainless steel



TAMPER-PROOF IDENTIFICATION BRACELET

Approved plastic bracelet with white label.

Avoids confusion during transfers. Adjustable one size fits all. Medical bracelet allowing the identification of the deceased. For hospitals, clinics and funeral homes. Available with a white writing area or with a transparent panel to insert a label. These funeral bracelets (in vinyl) are resistant to water, solvents and abrasive materials and are tear resistant.

Dimensions The bracelet measures 250 x25 mm

Réf. 720516 Adult – Box of 100 bracelets – transparent

Réf. 720517 Child – Box of 100 bracelets – transparent



HEADREST, MULTI-POSITION

Off-white color. 6 different positions to wedge the head at the desired height for body presentation.

Caution not suitable for frequent cleaning and all chemicals used.

Packing : By unit

Réf. 910230 In ABS : Lightweight for body presentation.

Dimensions 155 x 120 x 115cm Weight 300gr

Réf. 910230/C Rubber (resistant to any chemical products).

Specially adapted for use in forensic medicine

Dimensions 155 x 120 x 115cm Weight 980gr



BIODEGRADABLE CHIN-COLAR NORMORS

Allows the positioning of the head during the presentation. Is positioned at the level of the neck, to free the head from the thorax. Biodegradable material.

Réf. 703612 Large – Box of 10 (Male size)

Réf. 703612/M Medium – Box of 10 (Female size)



ADJUSTABLE CHIN REST

Adjustable plastic chin collar that allows positioning of the head during presentation and helps close the mouth

Is positioned at the level of the neck, to free the head from the thorax.

Made of black or white plastic - Adjustable height.

Réf. 706310 Packing : Box of 10




WRIST STRAP

Made of 1" wide (2.54cm) Velcro. It ensures that hands will stay in the right place, even outdoors. Also effective on very obese cases.

Réf. 910157 Packing : By unit





BODY PREPARATION



MOUTH SHAPED

Made of stainless steel, easier to press than the old chrome model. Increased durability with larger and more comfortable finger rings.

Réf. 703489 – The device Packing : By unit



MOUTH SHAPED HANDLE

The handle facilitates the use of the mouth-shaped injector and needle injection for people with small hands.

Réf. 703496 – The handle Packing : By unit

INJECTOR NEEDLES

Provides secure closure of the mouth.

Réf. 820019 Packing : Box of 144



EYE CAPS

Oval shape with asperites

Réf. 751345 Large Size – Transparent 3.2 x 2.4 cm – Packing : Pack of 100

Réf. 751340 Small Size – Transparent 2.6 x 2.0 cm – Packing : Pack of 100

Round shape without asperites

Réf. 751412 Transparent – Packing : Pack of 100



TROCAR BUTTONS

Used to seal the hole left by the trocar. The V-shaped closure shape makes it easy to close the orifice. It fights odours and liquid leaks, and will not tear.

Réf. 740019 Regular model – Packing : Box of 144



ADAPTATOR FOR TROCAR BUTTONS

The handle is made of stainless steel. Due to the design of its handle, it avoids rolling on the table. The double spindle end is compatible with most of the available trocar button shapes.

Réf. 701129 Packing : By unit



MOUTH FORMER

It allows the mouth to be shaped. To adapt it to the size of the mouth, it is generally cut with scissors. Once the mouth shape is definitively positioned then use the glue for a more durable hold.

Natural expression formers


Réf. 760496 Packing : Box of 12

Pierce armstrong mouth former

Réf. 760510 Packing : Box of 12

Plastic mouth plates

Réf. 760553 Packing : Box of 12



BODY PREPARATION

THANOSEAL

Occlusive film strip designed for incision, lacerations, abrasions, punctures and leaks. Provides a complete film to dry the paper pad and eliminate any leaks. Replaces traditional liquid plasters and avoids waiting for the glue to dry. The highly aggressive, non-sterile adhesive ensures that the gaps are filled. Once applied, the exterior can get wet without endangering the film. Easy to apply, without any additional support. Avoids sewing and minimizes the risk of injury.

Réf. 035207 Packing : Roller of 10,6 cm x 6,096 m



GEL MAX FEUILLE ABSORBANTE

The GelMax® sheets are in a box of 25 super absorbent pads. The powder is integrated into the structure of a cellulose buffer. GelMax® powder is able to absorb and gel liquids such as urine and body fluids. Thanks to its superabsorbent crystals, the gelation process takes place from the first contact by forming a compact amalgam, while slowing down the transformation of urea into ammonia, the molecule responsible for odours.

The absorption and gelation process are triggered by contact with liquids. In contact with fluids and materials, the pad acts quickly to gel the contents. Sheet thickness 50mm to be cut to the desired size

Réf. 502210 Packing : Box of 25 pads of 25 x 15 cm.



SEAMSTRESS' SCISSORS

Stainless-Steel, Seamstress's scissors for the clothes of the deceased, 23 cm

Réf. 704817 Packing : By unit



LISTER BANDAGE SCISSORS

Length of 18 cm - Stainless-Steel

Réf. 704577 Packing : By unit



RING CUTTER

Stainless steel, it allows to cut the rings still worn by the deceased in full safety.

Réf. 704818 Packing : By unit



HYDRO-ASPIRATOR

Allows the suction of body fluids at a distance thanks to a plastic tube (not supplied) to be fixed on the nozzle of the hydro-suction unit, the evacuation of the sucked liquids is done from below. Suction is carried out by the vacuum created by the vacuum pump system (to be connected to a cold water tap in order to generate the vacuum). Usually it is fixed above a sink tray. The hydro-suction unit is then evacuated directly into the tank.

Réf. 701199 The unit

Réf. 701238 The adaptor



WATERPROOF BOX FOR TRANSPORT

Waterproof, aluminum, it ensures you a safety to transport all your products in peace in your vehicle as well in case of leak of a bottle or in case of accident. It also allows storage of full pockets.

Réf. 920500 Dimensions (L x W x H) outside 60 x 40 x 41 cm and inside 55 x 35 x 38 cm.





HYGIENE AND SAFETY





PERSONAL PROTECTIVE EQUIPMENT : PPE



POWDER-FREE LATEX GLOVES REGULAR

The box of 100 Gloves - 240mm length

Réf. 751652 Size 6/7 – The Box

Réf. 751653 Size 7/8 – The Box

Réf. 751654 Size 8/9 – The Box

Réf. 751654XL Size 9/10 – The Box



POWDER-FREE NITRILE GLOVES REGULAR

Thick, ambidextrous, single-use nitrile gloves

The box of 100 Gloves - 240mm length. Blue color

Réf. 751655 Size 6/7 – The Box

Réf. 751656 Size 7/8 – The Box

Réf. 751657 Size 8/9 – The Box

Réf. 751658 Size 9/10 – The Box



NON-POWDER BLACK NITRILE GLOVES

Nitrile gloves, ambidextrous and single-use

The box of 100 Gloves - 240mm length. Black color

Réf. 751664 Size 6/7 – The Box

Réf. 751665 Size 7/8 – The Box

Réf. 751666 Size 8/9 – The Box

Réf. 751667 Size 9/10 – The Box



POWDER-FREE NITRILE GLOVES LONG HANDLE

Long handle, the box of 50 Gloves - 290mm length

Réf. 751660 Size 6/7 – The Box

Réf. 751661 Size 7/8 – The Box

Réf. 751662 Size 8/9 – The Box

Réf. 751663 Size 9/10 – The Box



OVERGUARD GLASSES

Protects the eyes from liquid or solid splashes. Polycarbonate, lightweight.

Compatible with sight glasses.

Réf. 505109 Packing : By unit



FACE SHIELD

Made of PET, equipment used by medical personnel to protect the area of the face and mucous membranes (mouth, nose, eyes) from droplets and splashes. Can be worn over goggles and masks, designed to maximize air circulation and prevent fogging.

Offers full facial protection, antistatic, disposable, optical quality visor.

Réf. 505109M The unit - Dimensions 32 x 23,5 x 11cm



DISPOSABLE WATERPROOF CARE GOWN

Provides protection against splashes, droplets, chemical or biological splashes. Neck and waist ties, elasticated cuffs, latex-free, single use. Made of polyéthylène and polypropylène.

Réf. 505096 One size – Packing : Pack of 10

Box of 100 blouses



PERSONAL PROTECTIVE EQUIPMENT : PPE

DISPOSABLE GOWN

Provides visitor protection and isolation - long, neck and waist ties, elastic cuffs.
Made of polypropylene.

Réf. 505099 One size – Packing : Pack of 10
Box of 100 blouses



WASHABLE COTTON HELMET

Intended to offer the embalmer, mortuary technician, medical student or pathologist and additional level of protection over surgical scrubs or normal house clothes when embalming, preparing or dissecting the deceased.
This gown comes in one size fits all. It will withstand frequent washing and disinfecting. If additional protection is required this gown should be used along with disposable aprons and disposable arm sleeves.
Complete with elasticated cuffs and back ties.

Réf. 750868 One size – Sold individually Green or blue



WATERPROOF SUIT

Disposable waterproof protective suit: Protection and comfort against chemicals or liquids (droplets) in the form of limited liquid splashes and solid particles. Elasticated hood and waist, ankles, cuffs. Zipper without self-adhesive flap on the closure (blue adhesive tape).

Non-woven polypropylene material and microporous PE film 45 g/m² (+/-5%)

Réf. 505120 Size available : Size 3/L - Size 4/XL - Size 5/XXL - Size 6/XXXL
Also available in large sizes 4XL/5XL/6XL



PROTECTIVE SUIT CLASS III

Protection against liquid chemicals, in the form of aerosols, liquid jets and solid particles.
Protection against bacteriological, infectious and pathogenic agents carried by dry (dust) or wet (blood and contaminated liquids) routes.

- Easy connection with a mask
- Elasticated cuffs with thumb loop
- Zipper with flap and tape.
- Wide flap and made of the same material as the suit guaranteeing the same chemical protection performance.

Réf. 505113 Size 3/L - Size 4/XL - Size 5/XXL
Color : yellow – Material : Multilayer polyethylene 90 g/m² (+/-5%)



PROTECTIVE BOOTS CLASS III

Overboots with non-slip soles. Elastic and ties at the calf for a perfect fit.
They go up to the genous and the sewn seams are covered.
To be combined with the Isofroid suit **ref. 505113**.
Color : yellow – Material : Multilayer polyethylene 90 g/m².

Réf. 505116 La paire - Taille unique





PERSONAL PROTECTIVE EQUIPMENT : PPE



PROTECTIVE APRON

Waterproof covering model.
White polyethylene - Single use 80 x 125cm

Réf. 505101 One size - Pack of 100 pieces



CLEAR SLEEVES

White colour - Elasticated at both ends

Réf. 505103 Polyethylene - The 50 pair bag



OVERSHOES

Single-use protection, guaranteeing perfect hygiene. Embossed polyethylene.
Waterproof and non-slip, elastic at the ankle and covered with material for greater comfort.

Réf. 505098 Blue colour - Pack of 50 pairs



ROUND CHARLOTTE

Single use - One size


Réf. 505107 Box of 100 units



WATERPROOF UNDERPAD

Waterproof underpad for the deceased: Underpad for maximum protection during the care of conservation or the toilet. Material: Polypropylene non-woven coated with polyethylene, weight 40 g/m², and an absorbent material. Each sheet consists of three layers: a top layer of fabric (PP), an absorbent middle layer and an impermeable bottom layer of PE (polyethylene).

Réf. 502211 Pack of 10 pieces - Size : One size, Width 60cm x Length 90cm

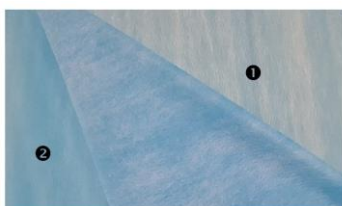

WATERPROOF FLAT SHEET

Waterproof flat sheet: Waterproof flat sheet for maximum protection during conservation care or toilet. Disposable are made of PP (polypropylene) and PE (polyethylene) non-woven fabric. Weight 40 g/m². Each sheet consists of two layers: a top layer of fabric (PP), and a bottom waterproof layer of PE.

Réf. 502140 Pack of 10 pieces - Size : One piece, Width 160cm x Length 240cm



PERSONAL PROTECTIVE EQUIPMENT : PPE

CHIRURGICAL 3-PLY MASKS

High filtration, hypoallergenic, latex-free and glass-fibre-free, ear-fixed care masks. With 3 pleats, polypropylene material.

Réf. 505104 The box of 50 masks

Réf. 505104N The box of 50 masks



RESPIRATOR MASK KN95

Comfortable particulate filtering respirator mask, duckbill shape, white colour. Filtration efficiency: 95% or more non-oily particle filtration rate. It is composed of a mask, a nose clip and a cord, size: 20 x 18cm, one size only.

It serves as protection against influenza viruses such as avian flu or Severe Acute Respiratory Syndrome linked to coronavirus (Covid-19 or SARS) and also pulmonary plague and tuberculosis.

Réf. 505112 The box of 20 masks



RESPIRATORY FILTRATION MASK WITH CARTRIDGE

Respiratory filtration mask with cartridge: The protection must bear the "CE" logo and refer to the EN standard. Respiratory protection can be provided in the form of a half mask or full mask. In the case of a half mask, it is also necessary to wear protective glasses to avoid eye splashes.

The half mask is designed to protect the respiratory tract from harmful gases and particles. Combined filters protect against particles, gases and vapours.

Réf. 505105 Mask without gas filters, brand MOLDEX

Réf. 505117 The pair of combined gas filters against formaldehyde, brand MOLDEX

Réf. 505118 The pair of combined particle, brand MOLDEX

Réf. 505111 The pair of combined particle and gas filters for formaldehyde previous model, brand SCOTT



ODOUR NEUTRALIZER NEUTROHANG

This product uses natural ingredients to contain the powerful and effective concentrated neutralizer. Works very well in chillers or refrigeration systems. Each bag will neutralize for 30-45 days on a surface of 55m².

Decomposition and odour neutralizer, prevents persistent odours, ideal for refrigerators and cold rooms, body transport boxes, embalming people vehicles, unique fabric mesh bag for uniform product distribution against odours, practical assembly loop, fights all air-controlled odours, 100% Organic carrier.

Réf. 921852 Mini Hang – Medium Volume (body transport box, cooling cell)
Packing : by 3

Réf. 921853 Neutro Hang – Large Volume - surface 55 square meters
Packing : by unit.



POUDRE ABSORBANTE ABSORBES

This product is used to retain liquids emitted during the decomposition of bodies. It is a powerful powder-granulated absorbent with a characteristic and very penetrating odour that absorbs bad smells. It can be used before putting in beer, a few grams will be enough at the bottom of the coffin to prevent the risk of runoff and odors.

Réf. 502115 Packing : Pot of 800 g.
Box of 6 jars

Réf. 502115/S Packing : 5 kg bucket





HYGIENE



DISINFECTING WIPES PURELL

Antiseptic wipes for hands and surfaces, without rinsing. Clean and disinfect all surfaces Cover all viruses including COVID 19
Bactericidal, virucidal, fungicidal

Réf. 502109 130 x 190mm – The box of 100

HYDROALCOHOLIC DISINFECTING GEL PURELL

Hydroalcoholic disinfectant gel, pump bottle for surgical hand disinfection by friction without adding water. Active up to 99.99% of the most common harmful germs including Covid 19 Keeps skin healthy
Bactericidal, virucidal, fungicidal, yeasiticide and mycobactericidal

Réf. 502107 Bottle of 500 ml



SURFACE DISINFECTANT SPRAY

Hydroalcoholic spray, Biocide of category TP2 and TP4 of the biocide regulation according to ECHA. For all surfaces and materials (application time depends on the support), all instruments, all clothes, during mortuary toilets, also allows to disinfect the body on the surface, during conservation care.

Réf. 505068L Bottle of 1 litre - packaging per box of 12 litres - Spraying device offered for every 6 bottles of 1 litre.

Composition Ethyl alcohol, isopropyl alcohol, hydrogen peroxide according to MSDS (available on request).
Brand ISOFRÖID.



ONE SHOT DISINFECTANT DEODORANT

Rapid disinfection of the premises, can be used in spray or self-percussion (One shot - once). This RONT brand product is bactericidal, fungicidal and complies with standards EN1276 and EN1275. Equipped with a self-percussion diffuser, the product can treat and sanitize a large volume of air, up to 50m3 (Ref. 502160) or up to 150 m3 (Ref. 502161). Ideal format in communities, schools, public buildings and public places, but also urban transport vehicles.

Réf. 502160 Bottle 50 ml - Per unit, for room volumes up to 50m3

Réf. 502161 Bottle 150 ml - Per unit, for room volumes up to 150m3



ODOUR-DESTROYING BACTERICIDE

Destruction of odour in aerosol, Bactericide to AFNOR 72-151 standard. Rapid treatment of premises, can be used as a spray. The product enables a large volume of air to be treated and sanitised. Ideal for use in communities, schools, public buildings and public places, as well as urban transport vehicles. For rooms with a volume of 50 to 150 m3 (20 to 60 m2). RONT brand.

Réf. 502163 Aerosol 1000 ml - mint fragrance.

Réf. 502164 Over powerful aerosol 1000 ml -orange fragrance



NEUTROLINE ODOUR-DESTROYING SPRAY

Very powerful disinfectant and odor destroyer for your living rooms, in the cells, to be sprayed also in the body transport boxes or after a treatment

Also spray on the body directly or on clothes, Recommended for putrefied bodies.

Réf. 921880 910 ml spray bottle

Réf. 921885 Pump bottle 230 ml



HYGIENE

DISINFECTANT CLEANER STAINLESS STEEL

Surface renovation : cleans, disinfects and polishes all types of stainless steel, ready to use. Bactericide in 5 minutes according to EN 1040, EN 1276 standards.

Réf. 502105 750ml spray with spray gun



NOCOSPRAY AERIAL DISINFECTION DEVICE

Allows total disinfection and effective sterilization of 99% of the entire funeral chamber, rooms, lounges, office, etc. Device that is easily transported. 1,100 watt electric turbine, rotation speed of 22,000 rpm, no liquid injection pump, Venturi fog spray up to 15 metres from the device, fog exit speed: 80 m/s, automatic shutdown, delayed start, ISO 9001 / ISO 13485. Volume 10 to 1000 m3

Réf. 502500 NOCOSPRAY diffuser weight 5,8 kg

Réf. 502502 NOCOLYSE+NOCODOR, 1 litre bottle, box of 6 refills



INSTRUMENT STERILIZER BY HOT AIR POUPINEL

Instrument sterilizer by hot air CE 0499 : Sterilization chamber made entirely of stainless steel 304, reflecting heat, which allows the temperature to be reached in a very short time and a homogeneous distribution of heat. Hermetic closure obtained by means of a special heat-resistant silicone gasket, thermally insulated chamber made of rock wool so as to avoid the transmission of heat to the outside as much as possible.

Equipped with thermostat and timer adjusting the time the thermostat is turned on with automatic switch-off and a manual position. Power supply 230V. Bipolar fuses, detachable cord.

Réf. 502152 Automatic, with 5 L basket : Thermometer, 200° thermostat, 120 min timer, safety thermostat, internal stainless steel basket, control lights.

Dimensions external : 500 x 325 x 170 mm – internal : 400 x 160 x 80mm. Power : 350w



Réf. 502151 Automatic, manual display, 20L : Timer 120 mn, thermostat adjustable from 0 to 220°C, safety thermostat calibrated to 240°C, control lights, key lock, cremone top and bottom.

Dimensions external 565 x 315 x 410 mm, internal : 405 x 250 x 220mm. Power : 400w



KIT HYGIENE

According to the regulations in force, see Code of Territorial Communities on Mortuary and Funeral Chambers

The kit includes 7 parts:

- 1 - Réf. 502015 : a disinfection tank with a 5 L capacity basket and a lid
- 2 - Réf. 502110 : a disinfectant for instruments, 5 L canister
- 3 - Réf. 502125 : 1 white bin with a capacity of 50 L
- 4 - Réf. 502124 : a stainless-steel soap dispenser, wall mounted, operated at the elbow
- 5 - Réf. 502123 : Antiseptic hand soap, 1L refill
- 6 - Réf. 502126 : hand towel dispenser, wall mounted
- 7 - Réf. 502127/5 : hand towel, refill 275 sheets

Réf. 502128

Réf. 502127 Hand towel recharge, carton of 20 packs of 237 sheets





HYGIENE



GARBAGE BAG HOLDER ON WHEELS

Ideal for all your DASRI. Ease of use, hands-free and hygienic
Holding the bag by plastic belt. Opening the lid with wide pedal
Corrosion-resistant powdered steel

Réf. 502122 Packing : By unit



FILTRE CHARBON ACTIF

PRÉ-FILTRE EU2

FILTRATION AND DISINFECTION BOX

Compliant with the regulations in force. It allows the renewal of air in the preparation room (4 x the room volume). Consisting of a turbine, an EU2 dust collection pre-filter, and a 200g/m³ activated carbon filter for cleaning the air before discharging to outside. The whole system is phonetically isolated in order to reduce the noise. Filters to be changed every 1600 hours.

Réf. 502120 Volume lower than 100m³ Average flow rate with 400m³/h filters

Réf. 502120/B Volume between 100m³ and 150m³ Average flow rate with 600m³/h filters

Réf. 502120/C Volume between 150m³ and 315m³ Average flow rate with 1000m³/h filters

Réf. 502130 A 200g/m³ activated carbon filter

Réf. 502132 A EU2 dust pre-filter.



FLOOR SIPHON

All stainless steel AISI 304, in compliance with the regulations in force: a siphon and a 0.1L basket, size 15 x 15 cm, it has a vertical outlet with a diameter of 5 cm. The flow rate is about 0.55 l/s. It has a rosette resistant to a concentrated static load of 3.3 KN.

Réf. 4285 Tiles flooring, with recovery basket

Réf. 4285/P Basket 0,1 liter for floor siphon

Réf. 4285/S Soft floor, with recovery basket



HYGIENE CENTER

Spray by venturi system a dosed solution of a cleaning and disinfection liquid, for example **Réf. 502601**. Wall mounting, including anti-pollution filter valve.

Réf. 502600 The power plant with a thermoformed PVC shell + a 15 m food hose resistant to 70°C and 20 bars + a shock gun resistant to 80°C and 20 bars + a 5L can holder + complete connection kit

Use the solution **Réf. 502601**, at a dosage of 1%, i.e. 50 ml for the hygiene unit with Jar of 5 liters



HYGIENE

HYGIENE UNIT WITH INTEGRATED STAINLESS STEEL REEL

Connection to the water network, without electricity or compressed air. Dosing kit 1 product (option x 2), with suction line and 5L bottle holder, automatic stainless steel reel, a shockproof gun resistant to 80 ° C and 20 bar, a food hose of 15 m resistant to 70 ° C and 20 bar.

Use the solution **Ref. 502601**, at a dosage of 1% or 40 ml with a 5 liter can

Réf. 502600E Stainless steel reel, not swivelling.

Réf. 502600S Swivel bracket for automatic reel



DETERGENT AND DISINFECTANT PRODUCT FOR FLOORS AND SURFACES FOR CENTRAL HYGIENE

Disinfectant detergent for floors and surfaces. Bactericidal yeast hygiene guarantees according to EN1040, EN1276, EN1650 and EN13697 standards, and virucidal EN14476 as well as according to DWRKI tests.

Dosage 1% or 40 ml or 10 doses in a bucket of 4L. in manual use (broom sponge or mop), in car wash or in central hygiene, as those proposed by Isofroid.

Réf. 502601 Jar of 5 liters



PURIFICATEUR D'AIR PROFESSIONNEL

Innovative and ecological technology. This purifier eliminates 99.99% of bacteria, fungi and viruses present in the air in less than 40 minutes, thanks to its double filtration (2 lateral air inlets) composed of : 2 particle filters, 2 HEPA 13 filters, and 2 Solid Alkaline filters. Once filtered, the air is expelled from above, via an anion generator (negative oxygen ions). The flow rate of clean air distributed is 520m3/hour (air treatment of a 36m2 room in less than 9 mn) : the most efficient technology on the market today.

Included 6 filters : 2 particle filters, 2 HEPA 13 filters, and 2 Solid Alkaline filters, 1 control panel with On / Off functions - Child safety - Sleep - Filter replacement management - Timer management (1 to 12 hours) - Fan speed control, 1 220 V power cord, 1 sensor, 1 user manual.

Certification Test and CE Mark, Certified Conformity to the requirements of the EU Electromagnetic Compatibility (EMC), Low Voltage Directive (LVD), and Restriction of Hazardous Substances (RoHS) (Reference: IEC 62321-3-1:2013), Solid Alkaline Removes Coronavirus, Certified by CAS Testing Technical Services Co. Ltd.

Réf. 502510 Medium model from 47 to 72m2 - Dimension 35.6 x 35.6 x 58.5 cm Weight 10 kg
Noise reduction : - of 60 dB - **Ref. 502511** Kit 4 Filters.

Réf. 502520 Small model from 22 to 38m2 - Dimension 24.6 x 44.5 x 60.0 cm Weight 8 kg
Noise reduction : - of 55 dB - **Ref. 502521** Kit 4 Filters.

Réf. 502530 Large model from 60 to 108m2 - Dimension 37.8 x 37.5 x 77.5 cm Weight 15 kg
Noise reduction : - of 68 dB - **Ref. 502531** Kit 4 Filters.





AUTOPSY



AUTOPSY'S REGULAR KIT WITH 11 INSTRUMENTS

Including :

- 1 Instrument box in stainless steel 350 x 180 x 80mm **Réf. 910160**
- 1 Cartilage knife, 8cm blade **Réf. 910166**
- 1 Autopsy knife, blade of 13 cm **Réf. 910165**
- 1 Pair of Enterotomy scissors of 20cm **Réf. 910163**
- 1 Ruskin single joint cutting liston pliers, straight 19cm, **Réf. 910171B**
- 2 Foam dissection forceps with claws **Réf. 910172**
- 1 Colin's mallet double head diameter 34mm, 20cm, 500 g **Réf. 910169**
- 1 Straight rachitome 20cm **Réf. 910174**
- 1 Saterlee Saw 29cm **Réf. 910176**
- 1 Retractor with 2 double claws, 3 x 4 Weitlaner teeth, 20cm **Réf. 910168**
- 1 Costotome 20cm type Doyen **Réf. 910164**

Réf. 910192



AUTOPSY'S COMPLETE KIT WITH 18 INSTRUMENTS

Including :

- 1 Stainless steel instrument box 350 x 180 x 80mm **Réf. 910160**
- 1 Cartilage knife, 8 cm blade **Réf. 910166**
- 1 Autopsy knife, blade of 13 cm **Réf. 910165**
- 1 Pair of scissors Enterotomy of 20cm **Réf. 910163**
- 1 Ruskin Cutting Liston Clamp 4 joints of 27cm **Réf. 910171**
- 2 Foam dissection forceps with claws **Réf. 910172**
- 1 Colin's mallet double head diameter 34mm, 20cm, 500 g **Réf. 910169**
- 1 Straight rachitome 20cm **Réf. 910174**
- 1 Saterlee Saw 29 cm **Réf. 910176**
- 1 Retractor with 2 double claws, 3 x 4 teeth type Weitlaner 20cm **Réf. 910168**
- 1 Scalpel handle **Réf. 703174**
- 1 Blade Box No. 22, Pack of 100 **Réf. 701468**
- 1 Pair of incision scissors **Réf. 704671**
- 2 Olive stylus **Réf. 9101785**
- 1 pack of 12 needles Long suture serpentine 12.5 cm **Réf. 704291**
- 1 chisel Mac Even 20cm **Réf. 910161**

Réf. 910193



BOX FOR AUTOPSY INSTRUMENTS

Stainless steel box dimension 350 x 180 x 80mm (L x W x H) to store all autopsy instruments.

Used in autopsy kits **Réf. 910192** and **Réf. 910193**.

Réf. 910160 Packing : By unit



AUTOPSY

ENTEROTOMY SCISSORS

Enterotomy Scissors are Designed with a probe tip to prevent inadvertent tissue laceration within hollow viscera.

These Scissors are Suitable for use in cutting of gastrointestinal tissue : stainless steel.

Dimensions Length of 21cm

Réf. 910163 Packing : By unit



COSTOTOME

Used to cut ribs and open the thoracic cavity during autopsy. Steel mechanical-action curved shears with a locking clasp at the back of the handles : stainless steel

Dimensions Length of 21cm

Réf. 910164 Packing : By unit



AUTOPSY KNIFE

This cutting tool has a tapered edge, to cut organs : stainless steel

Dimensions Length of 26cm - blade length of 13 cm

Réf. 910165 Packing : By unit



CARTILAGE KNIFE

This cutting tool has a tapered edge, to cut cartilage : stainless steel

Dimensions Length of 24cm - blade length of 8 cm

Réf. 910166 Packing : By unit



WEITLANER SPACER

Weitlaner Retractor holds muscles, organs and bones deeper : stainless steel

Dimensions length 20cm - 3 x 4 teeth

Réf. 910168 Packing : By unit



COLLIN MALLET

Surgical mallet is used with osteotomes, gouges and chisels in bone dissection or removal. Surgical mallet is heavy object with flat facings. They are manufactured in stainless steel.

Double head hake mallet 500 g

Réf. 910169 Packing : By unit





AUTOPSY



DOUBLE LISTON RUSKIN CLAMP

Liston Bone Cutting Forceps is a specialized surgical tool used to cut through long bones and bone processes, in order to gain access to another cavity or divide bone structure. Inner sharp edges granting precise bone cutting. Plier style grip handle ensuring maximum control.

Réf. 910171 Stainless steel - Length of 27cm – Double articulation - Cutting – By unit



SIMPLE LISTON RUSKIN CLAMP

Liston Bone Cutting Forceps is a specialized surgical tool used to cut through long bones and bone processes, in order to gain access to another cavity or divide bone structure. Inner sharp edges granting precise bone cutting. Plier style grip handle ensuring maximum control.

Réf. 910171B Stainless steel - Length of 19cm – Simple articulation – Cutting – By unit



DISSECTING FORCEPS

Dissecting forceps with rounded tips made of stainless steel - Length of 16 cm

Réf. 910172 With claws Packing : By unit

Réf. 910173 Without claws Packing : By unit



RACHITOME

An autopsy instrument used to open the spinal canal without damaging the marrow. Used in autopsy kits Ref. 910192 and Ref. 910193. Made of stainless steel - Straight – length of 22cm

Réf. 910174 Packing : By unit



MAC EVEN CHISEL

Used for the purpose of splitting long and/or dense bone such as the jaw, femur, or sternum, after autopsy specimens : stainless steel - Dimensions : 20 cm x 20 mm (L x W)

Réf. 910161 Packing : By unit



SATERLEE SAW

Saterlee saw with mobile back, allows the amputation of limbs : in stainless steel Length of 29 cm - Blade 20cm.

Réf. 910176 Packing : By unit



OLIVE STYLUS

The simple buttoned olive stylus, 16 cm long, is made of stainless steel. With its rounded tip, it can be used to probe wounds without the risk of damaging tissue.

Réf. 910178S Packing : By unit



OSCILLATING PLASTER SAW (occasional autopsy)

It can also be used as an autopsy saw OCCASIONALLY with the segmented bone blade. It has an ergonomic, modern and compact design. Supplied with 2 circular blades Φ 50 (for no deeper cut) and 65 mm (standard blade used by 90% of morgues). Quick blade change without tools.

Power 500 watts, speed 6500 to 24000 oscillations/min

Noise level 52 to 77 dB

Dimensions L 330 x Φ 55mm – 5m cord - Weight 1.53kg

Réf. 910195 Standard saw only in 230 V - 50 Hz

Réf. 910195LOS Special segmented bone blade - cutting width 24 mm and 55 mm on each side



PLASTER SAW WITH VACUUM CLEANER

The OSCIMED ERGO II saw is compact and lightweight and its ergonomic shape allows precise work effortlessly, even with one hand. Of robust construction, it is equipped with a cooling fan for intensive use without heating. The device operates under low voltage safety 24 Volts and meets the latest medical standards. Comes with 2 circular blades Φ 50 and 65 mm as well as a segmented blade 77 mm - Weight 0.860 g

Power 180 watts, speed 14500 oscillations/min Noise level 67 dB.

Dimensions L 230 x Φ 58mm - Power supply 230V 1.1m cord - Saw 24V 3m cord

Réf. 910196S Plaster saw ONLY

Réf. 910196LC Cylindrical blade Φ 65 mm (standard blade used by 90% of morgues)

Réf. 910196LC/50 Cylindrical blade Φ 50 mm

Réf. 910196LOS Segmented blade Φ 77mm (used for spinal cord removal)

Vacuum cleaner with 4 filtration levels.

Power 300 to 1000W - Suction 1.8L and 40L/s.

Saw holder and suction hose 2.5m, power supply socket for saw. Automatic start/stop of the vacuum cleaner synchronized with the saw. Washable fabric filter for liquids. Filtration 99.97% particles 0.3 μ m. Power supply 230 Volts / 50 Hz.

Weight Vacuum 12kg – ISO 13485.

Réf. 91019 Plaster saw with vacuum cleaner



SURGICAL OSCILLATING AUTOPSY SAW WITH VACUUM CLEANER

Surgical saw with aluminium body and oscillating: 13200 oscillations/min, IEC-601-1 standard.

Consisting of a handpiece a 1.3 kg cutting head, in 40 VDC, hermetically sealed, IP67 waterproof and a 1.7 kg IP65 power supply, with intelligent current limiting system to prevent overloading the saw. Available in 230 V or 110 V. 4m cable. Noise level 37 dB (without blade).

Three-stage filtration system vacuum cleaner thanks to a paper filter, a fabric filter, and a 0.6-micron cartridge filter. The suction works according to a negative pressure system allowing the paper bag to be changed without risk of losing its contents. This device is capable of filtering dry and partially wet materials, but should never be used to extract liquids. It has an IP44 protection against drops. Its capacity is 7 liters. Power supply 230 Volts / 50 Hz. Power 750W - Noise level 66 dB Filtration 99.997% particles 0.6 μ m.

Weight saw + power supply 3kg - vacuum cleaner 11,5kg.

Réf. 910198 Autopsy saw (handpiece only)

Réf. 910197 Autopsy saw with vacuum cleaner

Réf. 910198D64 Cylindrical blade Φ 64 mm

Réf. 910198D76 Cylindrical blade Φ 76mm.





BODY BAGS



BODY-BAG WITH CENTRAL CLOSING OXO-BIODEGRADABLE

Compliance with The French General Code Of Local Authorities R2213-15

Central Closing - Cover with a thickness of about 400 microns, sewn and welded, perfectly waterproof, double zipper sewn, opaque white colour. Interior in non-woven polypropylene culminated on the outside with a polyethylene film. Unique features thanks to its soft material (thick microfiber), it makes no noise when closed - Straight zip. Nylon and zip with double seam - Unit weight 370g (Ref. 459)

Packaging : cover in unit polyethylene bag : 25 covers / Box 42 x 51 x 45cm - Weight 10.3kg (Ref. 459)

Réf. 459 Large adult - 217 x 90 cm (L x W)

Réf. 469 Standard adult - 217 x 80 cm (L x W)

Réf. 460 New-born - 60 x 50 cm (L x W)

Réf. 461 Child - 120 x 60 cm (L x W)

Oxo Biodegradability : No blatant degradation before 3 months, then rapid degradation of the physical properties of the cover between 3 and 18 months, and total degradation between 18 and 24 months. Oxo-biodegradability control certificate N° (2009) GSJ - 1715 according to procedure HJ/T 209-2005 NPQTC International Laboratory.

BODY-BAG WITH U-SHAPED CLOSURE - OXO-BIODEGRADABLE

Compliance with The French General Code Of Local Authorities R2213-15

With U-shaped closure - Cover with a thickness of about 400 microns, sewn and welded, perfectly waterproof, double zipper sewn, opaque white colour. Interior in non-woven polypropylene culminated on the outside with a polyethylene film. Unique features thanks to its soft material (thick microfiber), it makes no noise when closed - With U-shaped closure zip. Nylon and zip with double seam - Unit weight 370g.

Packaging : cover in unit polyethylene bag - 25 covers / Box 42 x 51 x 45cm - Weight 10.3kg.

Réf. 464 Large adult - 217 x 90 cm (L x W)

Oxo Biodegradability : No blatant degradation before 3 months, then rapid degradation of the physical properties of the cover between 3 and 18 months, and total degradation between 18 and 24 months. Oxo-biodegradability control certificate N° (2009) GSJ - 1715 according to procedure HJ/T 209-2005 NPQTC International Laboratory.

BIODEGRADABLE BODY-BAG PEVA WITH CENTRAL CLOSING

Compliance with The French General Code Of Local Authorities R2213-15 - Approval by the Ministry of Health on 2/04/1991 and Compliant with NF EN 13432 11- 2000

Central Closing - Waterproof biodegradable body bag, made of PEDB (low-density polyethylene not recycled) white material. Zipper Central right and double zip, Cover thickness 150 microns, sewn welded and waterproof, double zipper glued - Straight zip. Nylon and zip with double seam - Unit weight 560g (Ref. 459/P)

Packaging : cover in unit polyethylene bag : 25 covers / Box 48 x 33 x 47cm - Weight 15.1kg. (Ref. 459/P)

Réf. 459/P Large adult - 217 x 90 cm (L x W)

Réf. 469/P Standard adult - 217 x 80 cm (L x W)

BIODEGRADABLE BODY-BAG PEVA WITH U-SHAPED CLOSURE

Compliance with The French General Code Of Local Authorities R2213-15 - Approval by the Ministry of Health on 2/04/1991 and Compliant with NF EN 13432 11- 2000

With U-shaped closure - Waterproof biodegradable body bag, made of PEDB (low-density polyethylene not recycled) white material. Zipper double zip, Cover thickness 150 microns, sewn welded and waterproof, double zipper glued. Nylon and zip with double seam - Unit weight 560g

Packaging : cover in unit polyethylene bag : 25 covers / Box 48 x 33 x 47cm - Weight 15.1kg.

Réf. 464/P Standard adult - 217 x 80 cm (L x W)





BODY BAGS

BODY-BAG FOR OBESE WITH U-SHAPED CLOSURE AND 4 HANDLES

With U-shaped closure and 4 handles with internal tube reinforcement of 33 x 2cm at each handle - Cover with a thickness of about 400 microns, sewn and welded, perfectly waterproof, double zipper sewn, opaque white colour. Interior in non-woven polypropylene culminated on the outside with a polyethylene film. Unique features thanks to its soft material (thick microfiber), it makes no noise when closed - With U-shaped closure zip. Nylon and zip with double seam - Unit weight 1 kg

Packaging : cover in unit polyethylene bag : 10 cover / box

Box 60 x 49 x 45cm - Weight 11.6kg.

Réf. 466 Bariatric adult - 250 x 110 cm (L x W)

**HEAVY DUTY PUCH, BODY-BAG FOR TRANSPORT, WITH 10 HANDLES**

Specially adapted to carry a body over a long distance: waterproof, reinforced vinyl body bag, C-shaped closure and double zip, thickness 400 microns, with 10 sturdy exterior handles.

Packing : Box of 6 covers

Réf. 755067 Large adult - 226 x 99 cm (L x W) - PVC, black

**BODY-BAG FOR TRANSPORT, THICK WITH 6 HANDLES**

Waterproof body-bag for transport, made of PVC material, black or white, U-shaped closure and double zip, thickness 300 microns, with 6 reinforced rigid inner handles. Transparent label pouch

Packing : Box of 10 covers

Réf. 465 Large adult - 222 x 100 cm (L x W)

**EXHUMATION BODY BAG**

Casket-shaped cover designed to collect mortal remains during exhumations. Facilitates handling while maintaining essential hygienic conditions. Made of black granite PVC of great strength. Equipped with a white nylon zipper, thickness 230 microns, central closure and double zip, black colour.

Packing : Box of 10 covers

Réf. 453B Dimensions 220 x 71 x 74 cm (L x W x H)

**BONES BAG**

Designed to collect bones during reductions. White zip. Black PVC material, thickness 230 microns

Packing : sold by 10 minimum - Box of 50 bag

Réf. 475 Medium 60 x 30 x 25 cm (L x W x H)

Réf. 476 Large 80 x 34 x 17 cm (L x W x H)





FUNERAL AND CEREMONIAL





CEREMONIAL AND HYGIENE



SIGNATURE TABLE

Practical, aesthetic, folding, equipped with a quick opening / closing device that is easy to handle, without disassembly, neat finish : double-sided varnished wooden tray and 2.5 and 3 cm square chromed steel tube structure. Equipped with 4 adjustable cylinders ensuring perfect stability. Single unit, individual carton packing
Dimensions 87 x 50cm (H x W). Three available lengths

Réf. 1670 L 50 cm - 6,0Kg. Folded 97 x 50 x 15

Réf. 1675 L 70 cm, - 6,8Kg. Folded 105 x 50 x 15

Réf. 1680 L 100 cm - 7,5Kg. Folded 120 x 50 x 15



VELVET CARPET OR SKIRT FOR SIGNATURE TABLE

Carpet or skirt to cover the signature table in plain or two-tone velvet fabric. Finish with or without gold or silver braid. Bordeaux, navy blue, anthracite grey, black, brown, ecru and green. Possibility to have it also in upholstery fabric. Also personalized embroidery possible. Contact us.

Réf 1671 Velvet carpet or skirt for signature table

Réf 1672 Velvet skirt to surround the table



REGISTOR PROTECTOR FOR SIGNATURE TABLE

Condolence register protector with wooden contour and glass on top for signature table. Sold by the unit.

Réf 1673 Medium - Dimensions 50 x 50cm

Réf 1674 Large - Dimensions 70 x 50cm



DISPLAY RACKS FOR COFFIN

Folding, robust, stable and aesthetic. Base in round chromed steel tube 2.2 cm and support in square tube 3 cm in black epoxy, 4 noise pads and open or closed position holding system
Dimensions in cm : length 51 cm x width 43 cm (open position)

Réf. 1655 By pair : 45 and 55 height

SKIRT FOR COFFIN OR TROLLEY

Velvet skirt for dressing the outline of the coffin or trolley. Finish with or without gold or silver braid. Possibility to have it also in upholstery fabric. Contact us. Also personalized embroidery possible. Contact us.

Réf 828 Covering the contour of the coffin - Packing : By unit

Réf 829 Covering the contour of the trolley - Packing : By unit

EXTENTABLE TROLLEY FOR PRESENTATION OF COFFIN

Practical, lightweight, durable (tested at 200 kg), used to ensure the safe handling and transport, indoors and outdoors, of your coffins (church, cemetery, etc.). Easy to store in any transport vehicle. 3 cm square and 2.5 cm square structure (extensible part), assembly of security nuts and rivets, equipped with 4 wheels, 2 of which have brakes and non-staining rolling tires, 8 non-slip pads and 4 handles that can be swivelled and folded at 90°. Includes Locking Bar.

Réf 1600 4 wheels Φ 12,5 cm - Unfolded 144 x 55,5 x 82 cm (L x W x H) - Folded 57,5 x 70,5 x 20 cm - 16Kg

Réf 1620 4 wheels Φ 16 cm - Unfolded 144 x 59 x 82 cm (L x W x H) - Folded 57,5 x 74 x 21 cm - 18Kg

Réf 1650 4 wheels Φ 20 cm - Unfolded 144 x 66 x 82 cm (L x W x H) - Folded 57,5 x 78 x 21 cm - 22Kg





PRESENTATION IN FUNERAL ROOM

SET FOR REFRIGERATED FUNERAL TABLE

Upholstery fabric upholstery designed for better presentation of the deceased to the family on refrigeration tables.

- Quilted cover lined with plasticized fabric
- Fabric skirt lined with plasticized fabric
- Quilted pillowcase lined with plasticized fabric

Option possibility add a headband 1M60 X 45 cm.

Machine cleaning at 40°C or dry cleaning - No tumble dryer.

Different fabrics and many colors.

Finish to be defined duvet, ruffles with flap, duvet with additional headband.

Contact us.

BACCARAT

Réf. 827BAC62 Baccarat plain fabric largeur 62cm

Réf. 827BAC74 Baccarat plain fabric largeur 74cm

CANCUN

Réf. 827CAN62 Cancun Fabric largeur 62cm

Réf. 827CAN74 Cancun Fabric largeur 74cm

KERALA

Réf. 827KER62 Kerala fabric largeur 62cm

Réf. 827KER74 Kerala fabric largeur 74cm

EVITA

Réf. 827EVI62 Evita Fabric largeur 62cm

Réf. 827EVI74 Evita Fabric largeur 74cm

EVENTAIL

Réf. 827EVE62 Eventail Fabric largeur 62cm

Réf. 827EVE74 Eventail Fabric largeur 74cm

REFLET

Réf. 827REF62 Reflet fabric largeur 62cm

Réf. 827REF74 Reflet fabric largeur 74cm

ETERNEL

Réf. 827ETE62 Eternel fabric largeur 62cm

Réf. 827ETE74 Eternel fabric largeur 74cm



WADDING PILLOW

Wadding pillow for pillowcase for refrigerating table covering.

Réf 827/OREIL Packing : By unit



TRANSFER ET PRESENTATION PILLOW

Facilitates its positioning. Inflatable with retractable valve. Oval shape. Material PVC - White colour.

Packing : box of 10 minimum

Réf. 454 dimensions 60 x 50 x 10 cm (L x W x H)





PRESENTATION EN SALON



UNIVERSAL SET FOR TROLLEY SINGLE USE

Single-use dressing, for the presentation of the body on most display trolleys or refrigerating tables width of 75 cm maxi and for length of 180 à 210 cm maxi.

Made of very flexible material (such as thick microfibre), non-woven polypropylene material.

Composed of a sheet, a pillowcase and a presentation blanket.

Box of 10 - 184 x 25 x 25 - poids net 9.5 kg et brut 10.5 Kg

Réf. 483 One size fits all - Camel colour Packing : per roll of 10



Prune, Marron, Camel



UNIVERSAL SET FOR REFRIGERATED FUNERAL TABLE SINGLE USE

Single-use brown or plum-coloured dressing for refrigerating table.

Made of very flexible material (such as thick microfibre), non-woven polypropylene material.

Composed of a skirt, a pillowcase and a presentation blanket. One size fits all, a refrigerating table with a maximum width of 65cm and a length of 190cm or a presentation trolley.

Packing :

The cover Unit weight 330 g per roll of 15, roll of 170 x 18 x 18

net weight 5.0 kg and gross 5.95 Kg

The pillowcase Unit weight 60 g x 15

The fitted sheet Unit weight 150 g x 15

Réf. 480 One size - Colour Camel

Réf. 481 One size - Colour Plum

Réf. 482 One size - Colour Brown



DRAP FOR COFFIN

To cover the coffin when presenting the coffin in places of worship, in the burial chamber, in the cemetery...

Réf 840 Three-coloured sheet Packing : By unit



MEDAL CUSHION

Velvet cushion for the presentation of medals during ceremonies.

Réf 860 Colours: burgundy, navy blue, grey and fir green



WOODEN CLADDING FOR REFRIGERATED FUNERAL TABLE

The uprights, crosspieces and legs are made of solid beech and the panels of melamine wood. 3 varnishes available for solid beech: crystal natural, dark oak and cherry.

Only 1 melamine colour for the panels: bleached ash colour. Weight 15kg.

Dimensions L x W : 200 x 69 cm - Height of wooden bed apron 57cm - Height of wooden bed foot 63cm - Height of the headboard 95cm

Réf 850 For table widths 62cm (Réf. 1000)

Réf 855 For table widths 74cm (Réf. 1005)



CATAFALQUE FOR COFFIN

Specially designed for the presentation of the coffin, catafalque in oak laminate veneer, 16mm water repellent. **Dimension** 160 x base 50 / top 40 x 48 cm (L x W x H) - 4 castors 50mm

Réf. 1150 Melamine wooden catafalque

Réf. 1151/S Solid wood catafalque Fir

Réf. 1151/H Solid wood catafalque Beech

Réf. 1151/C Solid wood catafalque Oak



PURIFYING FILTER FOR COFFIN / ZINC

Filter approved by the Ministry of Public Health and approved by the Ministry of Civil Aviation for transport by land, sea and air

Réf 500 Purifying filter for coffin

PURIFYING FILTER FOR CELLAR

Purifying filter for concrete vaults, NF approved (NFP 98-049 standard) Installation of the filter inside the vault or tomb, threaded outlet vent rod with nut and gasket. Allows sealing to cross the wall.

90° mounting or straight mounting to choose.

Réf 501 Purifying filter for cellar

LIFTING STRETCHER

Spoon-shaped lifting stretcher composed of 2 separable longitudinal elements, which slip under the deceased without moving or manipulating him. The length of the stretcher adjusts according to the size of the body. Automatic locking after positioning the 2 elements under the body.

Foldable in half for easy storage and transport.

Aluminum, Lightweight and robust, 2 quick lock/unlock holding straps.

Dimensions width 44 x Minimum length 171 - max 210 cm (Folded length 120cm) - H unfolded 6cm - folded 9cm Weight 8,5Kg

Permissible load 159 Kg

Réf 470 Packing: By unit

HANDLING AID DEVICE FOR BODY

For transferring and lateralising of the body. The "SLIDE" allows the transfer of the body from one support to another (stretcher, stretcher, refrigerated table...), and it adapts to any morphology. Due to its flexibility and robustness, it limits efforts and limits work accidents. It allows lateralization with a minimum of effort: tilting effect thanks to the weight of the body. Hygienic, easy to disinfect.

Réf 502700 La paire

METAL FUNERAL URN

Volume of 3.7 liters with ashtray, double lid

Unit weight 700g - Height 22 or 24cm - Ø 16 cm

Packing : By unit

Ref. U2500 GERA - White colour with gold trim - Height 24cm

Ref. U2510 JOCA - Blue colour with gold trim - Height 24cm

Ref. U2520 MARA - Bordeaux colour - Height 24cm

Ref. U2530 CHARA - Hammered grey colour - Height 22cm

Ref. U2560 SAMA - Grey colour - Height 24cm

Ref. U2570 BENA - Black colour - Height 24cm

Ref. U2550 ROMA - Blue color with gold pattern - Height 24cm


Ref. U2540 TANA - Bordeaux colour with gold pattern - Height 24cm


Ref. U2580 DIDA - Green colour with gold trim - Height 24cm

Ref. U2590 ROSA - Plum colour with leaf borders - Height 24cm

Ref. U2600 CEMA Mocha colour with leaf border - Height 24cm

Ref. U2610 ANIA - Ruby colour with leaf edging - Height 24cm



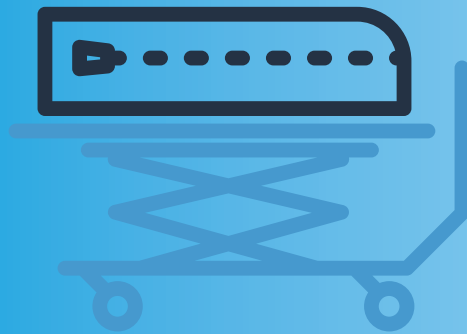

POST-MORTEM MATERIAL





REFRIGERATION OF THE BODY



FUNERAL COOLING TABLE

Adapted for the conservation and presentation of the deceased in a funeral home or at home. It is composed of a refrigerated part in stainless steel, inclined at the level of the head, the leg part is foldable, facilitating its transport. It rests on 4 swivel wheels, two of which are braked. The cooling unit is hidden in the ABS base making it very quiet and light. A removable tank recovers condensate water.

Alimentation électrique 230V / 1 N~ / 50Hz

Dimensions Width 62 cm or 74 cm, length of the unfolded table 190 cm (folded 120cm), apron height 57 cm and head height 70 cm, weight 46 Kg, permissible load 230 Kg

Réf. 1000 Width 62 cm – Packing : By unit with individual box

Réf. 1005 Width 74 cm – Packing : By unit with individual box



FUNERAL PRESENTATION TABLE

Adapted to the presentation of the deceased not requiring refrigeration (thanatopraxia). It is composed of a stainless steel part, inclined at the level of the head, the leg part is foldable, facilitating its transport. It rests on 4 swivel wheels, two of which are braked.

Dimensions Width 62 cm or 74 cm, length of the unfolded table 190 cm (folded 120cm, apron height 57 cm and head height 70 cm, weight 30 Kg, permissible load 230 Kg

Réf. 1000/SG Width 62 cm - Packing : By unit with individual box

Réf. 1005/SG Width 74 cm - Packing : By unit with individual box



CONCEALMENT COVER FOR FUNERAL COOLING TABLE

Composed a grey polyester fabric bellows, easy to clean and disinfect, foldable.

Dimensions Width 62 cm or 74 cm, length 190 cm, height 40 cm.

Réf. 1000/D Width 62 cm - Packing : By unit with individual box

Réf. 1005/D Width 74 cm - Packing : By unit with individual box



FUNERAL TABLE RISER

The 20 cm raised base, very practical for the use of tables in nursing homes, allows a presentation at height and easy handling from a stretcher trolley with fixed height. With the riser, the deck has a height of 77 cm instead of 57 cm. Possibility to return to the initial height of 57 cm, with a kit of shorter threaded rods.

Réf. 1000R Possible option, to be postponed when buying a funeral table



FUNERAL REFRIGERATING RAMP

Suitable for the conservation of the deceased at home, composed of a stainless cooling vault to be placed on the body (dimension L x W: 88 x 40 cm), connected by a 2-meter connection hose to the refrigeration unit which is hidden in a stainless steel hood (L x W x H: 40 x 30 x 40 cm).

Power supply 230V / 1 N~ / 50Hz

Weight 32 Kg

Réf. 1100 Packing : By unit with individual box



BODY TRAY CURVED

It allows the transport of the deceased effortlessly from the trolley to the refrigerated cell. Made of 304 stainless steel, it is curved for liquid retention. It is equipped with a drain with plug which facilitates its cleaning. Equipped with 4 pebbles of diameter 8 cm, it is easy to manipulate thanks to its handle. It is compatible with all trolleys and refrigeration cells.

WEIGHT 60CM

Load capacity of 250 Kg
Dimensions L 197 x W 60 x H 11,6 cm
Weight 17 kg
Réf. 1561



WEIGHT 75CM FOR LARGE OR OBESE BODY

Load capacity of 350 Kg
Dimensions L 197 x W 75 x H 14 cm
Weight 19 kg
Réf. 1571



WEIGHT 90CM FOR BARIATRIC BODY

Load capacity of 350 Kg
Dimensions L 197 x W 90 x H 14 cm
Weight 23 kg
Réf. 1571/90

BODY TRAY FLAT WIDTH 60CM

It allows the transport of the deceased effortlessly from the trolley to the refrigerated cell. Made of 304 stainless steel, It benefits from an absence of rim thanks to a slight curve that greatly facilitates the translation of the deceased during its handling. It is equipped with a drain with plug which facilitates its cleaning. Equipped with 4 pebbles of diameter 8 cm, it is easy to manipulate thanks to its handle. It is compatible with all trolleys and refrigeration cells.

Load capacity 250 Kg
Dimensions L 197 x W 60 x H 11,6 cm
Weight 16 kg.
Réf. 1560



BODY TRAY FLAT WIDTH 60CM MOUNTED ON 2 SKIS

It allows the transport of the deceased effortlessly from the trolley to the refrigerated cell. Made of 304 stainless steel, It benefits from an absence of rim thanks to a slight curve that greatly facilitates the translation of the deceased during its handling. It is equipped with a drain with plug which facilitates its cleaning. It is easy to manipulate thanks to its handle. It is compatible with all trolleys and refrigeration cells.

Load capacity 250 Kg
Dimensions L 197 x W 60 x H 11,6 cm
Weight 17 kg
Réf 1560/S





DISASTER ROOM



RACK WITH A CAPACITY OF 3 BODIES

Made of 304 stainless steel, it allows the storage of a large number of bodies in a disaster chamber. Variable capacity from 3 bodies for stretchers of 60cm or 75cm with standard centre distance 56cm. The rails have an end stop and a stretcher locking system, 4 swivel wheels Φ 12.5 cm including 2 with brake to lock the rack during handling. The position of the bodies relative to the ground varies according to the capacity of the rack : For 3 corpses, the levels are 35, 104 and 173cm from the floor.

Dimensions Width according to stretcher 70 or 85 cm x L 200 cm x H 181 cm

Réf. 1503 Rack with 3 stretcher width 60cm

Réf. 1503/L Rack with 3 stretcher width 75cm



RACK WITH A CAPACITY OF 4 BODIES

Made of 304 stainless steel, it allows the storage of a large number of bodies in a disaster chamber. Variable capacity from 4 bodies for stretchers of 60cm or 75cm standard centre distance 56cm. The rails have an end stop and a stretcher locking system, 4 swivel wheels Φ 12.5 cm including 2 with brake to lock the rack during handling. The position of the bodies relative to the ground varies according to the capacity of the rack : For 4 corpses, the levels are 35, 81, 126 and 174cm from the floor.

Dimensions Width according to stretcher 70 or 85 cm x L 200 cm x H 185 cm

Réf. 1504 Rack with 4 stretcher width 60cm

Réf. 1504/L Rack with 4 stretcher width 75cm



CORPS RACK WITH A CAPACITY OF 5 BODIES

Made of 304 stainless steel, it allows the storage of a large number of bodies in a disaster chamber. Variable capacity from 5 bodies for stretchers of 60cm or 75cm standard centre distance 56cm. The rails have an end stop and a stretcher locking system, 4 swivel wheels Φ 12.5 cm including 2 with brake to lock the rack during handling. The position of the bodies relative to the ground varies according to the capacity of the rack : For 5 corpses, the levels are 35, 77, 112, 163 and 189cm from the floor.

Dimensions Width according to stretcher 70 ou 85 cm x L 200 cm x H 200 cm

Réf. 1505 Rack with 5 stretcher width 60cm

Réf. 1505/L Rack with 5 stretcher width 75cm

DISASTER ROOM WITH A CAPACITY OF 10 BODIES

The cell is an inflatable tent for use in positive cold rooms: $+2^{\circ}\text{C}$ to $+10^{\circ}\text{C}$.

Consisting of 3 double-skinned PVC 0.6 mm padded walls, and single-skinned on the door side for better air circulation to avoid condensation. "Chapelle ardente" tent, house or marquee shape, captive air tent, Pantone color solid white. Pump/pressure regulator included, non-return valve + pressure relief valves, hot/cold air sleeves + wire and electrical conduit sleeves. No markings, no windows, no ground tarpaulin, no mud flaps. Opening 1 wide gable door, dimensions: H = 2 m, W = 1 m, Velcro fasteners. Side-mounted air-cooled refrigeration unit, hermetic compressor, condenser fan, cooling capacity 3.5 KW, at $+5^{\circ}\text{C}$ ambient temperature 40°C (max. $+43^{\circ}\text{C}$), R134A gas, automatic hot-gas defrosting, 1 power supply 400V / 3~ / 50Hz.

Capacity : 10 bodies (other capacities on request: 20 or 40 bodies).

Configuration useful internal dimensions for 10 bodies (W x H x D) 150 x 230 x 500 cm (forklift clearance) with addition of 2 5-body racks (Ref. 1505 not included).

Réf. 1510 Disaster room with a capacity of 10 bodies





PRESENTATION TROLLEY AND TABLE

PRESENTATION AND PREPARATION TROLLEY

Made of 304 stainless steel, this trolley is used for the preparation of the body and/or the presentation of the deceased to the family (with his stretcher) or the handling of stretchers. The trolley has 2 rails 165 cm long and 5 cm wide, the rails of our variable height handling trucks are placed inside, allowing the transfer of the stretcher safely. The trolley has 4 swivel wheels of Φ 10 cm, 2 of which have brakes to lock the trolley during handling. On the rails, an end stop and a spring locking system allow the stretcher to be fixed on the trolley.

Dimensions Length 61 cm x Width 160 cm x Height 75 cm - Weight : 16 Kg

Réf. 1350 Classic trolley **Admissible load** 230 Kg

Réf. 1350/O Classic trolley for obese, 4 wheels fixed on plates **Admissible load** 350 Kg

This tilting trolley can be used to make toilets with the washing units **Ref. 3500 and 3550**. It is equipped with a manually operated hydraulic cylinder, allowing the tilt of the tray facilitating the evacuation of washing water from the stretcher bung to the wash unit drain pan.

Dimensions Length 61 cm x Width 160 cm x Height 76 cm - Weight : 20 Kg

Réf. 1300 Reclining trolley **Admissible load** 230 Kg

Réf. 1300/O Tilting trolley for obese, 4 wheels fixed on plates **Admissible load** 350 Kg



INCLINED PRESENTATION TABLE

Made of 304 stainless steel, mounted on a 30 x 30mm base with Φ 10 cm wheels, 2 of which have brakes to lock the table during handling. This table allows the body to be presented, either directly on the table or in the coffin. Includes drain and plug.

Réf. 1400 Standard **Admissible load** 230 Kg

Dimensions Length 60 cm x Width 190 cm x Height 50 cm et 60 cm (head side) - Weight : 35 Kg

Réf. 1400/O With 4 wheels fixed on plates **Admissible load** 350 Kg

Dimensions Length 75 cm x Width 210 cm x Height 50 cm et 60 cm (head side) - Weight : 38 Kg



PREPARATION TABLE FOR BODIES

Made of 304 stainless steel, mounted on a 30 x 30mm base. This table is used to wash the deceased. Includes drain and plug.

Dimensions Length 75 cm x Width 210 cm x Height 85 cm (other heights on request) - Weight 30 Kg

Réf. 3300 Table on legs **Admissible load** 230 Kg

The trolley has 4 swivel wheels of Φ 10 cm, 2 of which have brakes to lock the trolley during handling.

Réf. 3350 Mobile table - Weight 35 Kg **Admissible load** 230 Kg

Réf. 3350/O Mobile table with 4 wheels fixed on plates - Weight : 38 Kg **Admissible load** 350 Kg

Tiltable version, it is equipped with a hydraulic cylinder with manual control, allowing the inclination of the tray facilitating the evacuation of washing water from the stretcher bung to the wash unit drain pan.

Dimensions Length 75 cm x Width 190 cm x Height 85 cm (other heights on request) - Weight : 35 Kg

Réf. 3900 Mobile with tilt **Admissible load** 230 Kg

Réf. 3900/O Mobile with tilt and with 4 wheels fixed on plates **Admissible load** 350 Kg

Options with an Etiroflex, evacuation on rigid but flexible pipe from 30 to 60cm, with a single-use trim **Ref. 483** (Camel color).



VARIABLE HEIGHT BODY PREPARATION TABLE

Made of 304 stainless steel, with a simple height-adjustable cross-piece controlled by an electric control box. This table can be used to wash the deceased, and can be adjusted to the desired height for ergonomic positioning of the user. Includes drain and plug.

Dimensions Length 62 cm x Width 190 cm x Height 50 à 90 cm - Weight : 70 Kg

Réf. 3650 Variable height preparation table **Admissible load** 200 Kg





FORKLIFT TROLLEY



ELECTRIC FORKLIFT

Allows effortless transfer of the stretcher to the different heights of the cooling cell, **from 32 to 182 cm**. Made of stainless steel for its robustness and ease of maintenance, it is easy to handle thanks to its 4 large swivel wheels of Φ 12.5 cm including 2 with brake. Lifting is effortless, thanks to an electric cylinder controlled by a wired control. Optimized wheelbase : front/rear 145 cm, and left/right 50cm, reduced ground clearance 6 cm.

Dimensions Width 61 cm x Length 160 cm x handle height 75 cm

Load capacity 220 Kg (à 50 cm de hauteur)

Supply 230 / 1 / 50Hz

Weight 80 Kg

Available option Wall charger with battery, **Réf.2350/O**

Réf. 2350 Classic version

Réf. 2351 Reclining version

Réf. 2350/L Sidelading version



HYDROELECTRIC AND MANUAL FORKLIFTS

Allows the transfer of the stretcher effortlessly to the different heights of the cooling cell, **from 32 to 190 cm**. Made of stainless steel for its robustness and ease of maintenance, it is easy to handle thanks to its 4 large swivel wheels of Φ 12.5 cm including 2 with brake.

Dimensions Width 65 cm x Length 220 cm x handle height 75 cm

Réf.2300 Hydroelectric version

The elevation is carried out effortlessly thanks to the electrically controlled hydraulic cylinder, it is controlled by a fixed control.

Load capacity 250 Kg

Supply 230 / 1 / 50Hz

Weight 115 Kg



Réf. 2430 Hydroelectric version for obese bodies

The elevation is carried out effortlessly thanks to the electrically controlled hydraulic cylinder, it is controlled by a fixed control.

In addition to a reinforced structure, it is equipped with 4 swivel wheels of Φ 12.5cm suitable for heavy loads, 2 of which are with brake.

Load capacity 350 Kg

Supply 230 / 1 / 50Hz

Weight 130 Kg



Réf. 2260 Manual version

Equipped with a hydraulic pump with foot control, it is easy to maintain and requires no power supply.

Load capacity 200 Kg

Weight 105 Kg

Ref. 2310



AVAILABLE OPTIONS

Coffin frames, they allow the handling of coffins

Réf.2310 It is installed between the rails of the trolley, with 4 PVC rollers Φ 5cm

Réf.2313 Frame with coffin balls

Ref.2312 Stainless steel tray with coffin balls



FORKLIFT TROLLEY

MOTORIZED WHEEL ADAPTABLE TO FORKLIFT


It is a fifth wheel installed in a central position, it allows the movement of the trolley without any effort.

The system is activated via the control handle, and by activating the forward or reverse speed control, the motorized wheel lowers for travel. The energy required is supplied by a lithium-ion battery. The system is activated and deactivated at the touch of a button. Once the motor has been raised, the truck resumes its original functions.

Features Contact pressure force 400N, Rolling direction : front and rear, Ground clearance 30mm, Ground irregularity : + or - 15mm, Emergency release : mechanical, Protection : IPX4

Supply 230/ 1 / 50Hz

Réf. 2350/ED

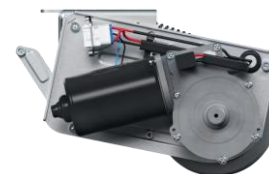

WEIGHING ON FORKLIFT

This optional body weighing system fits on all types of forklifts. Range from 0 to 300 Kg, Accuracy 10gr (excluding Legal Metrology).

Attention, does not include the forklift.

Réf. 2350/P Weighing system to be adapted to trolleys



CHARIOT ÉLÉVATEUR ÉLECTRIQUE DE TRANSPORT

This trolley is specially designed to fetch the body from the chamber, or for the transport or presentation of the body. Its variable height from **50 cm to 90 cm** makes it possible to adapt the height of the stretcher to facilitate the transfer. The single brace lifting system brings great robustness and rigidity to the whole and gives the stretcher perfect stability. Lifting is effortless, thanks to an electric cylinder driven by a wired control. Made of stainless steel for its robustness and ease of maintenance, it is easy to handle thanks to its 4 large swivel wheels of Φ 12.5 cm including 2 with brake.

Optimized wheelbase: front/rear 145 cm, and left/right 50cm, reduced ground clearance 6 cm.

Dimensions Width 62 x Length 206 x Variable height 50 - 90 cm

Load capacity 200 Kg

Réf. 2100 Standard with guide handle

Weight 60 Kg (without stretcher).

Réf. 2100/T with tunnel shape concealment

With a flat stretcher **Réf. 1560**, 4 removable 304 stainless steel hoops, size Φ 600mm and height 30 cm, and a tunnel-shaped cover with 2 closed ends, made of grey polyester fabric, easy to clean and disinfect.

Weight 75 Kg (with stretcher and concealment).

Réf. 1900 With concealment type gusset

With a curved stretcher **Réf. 1561** and a cover, gusset in grey polyester fabric, easy to clean and disinfect, foldable.

Weight 75 Kg (with stretcher and concealment).





TROLLEYS FOR OBESE BODIES AND COFFINS



TROLLEY FOR OBESE FOR TRANSPORT WITH CONCEALMENT

All stainless steel 304 manual trolley

4 swivel wheels Φ 20cm mounted on plate, 2 of which with brake, with handle guidance, a concealment tarpaulin, held on hoops, reinforced on 304L stainless steel structure.

A curved stretcher **Réf. 1571** with 2 straps and a concealment cover, gusset in white PVC canvas, easy to clean and disinfect, foldable.

Its 2 rails for wheeled stretchers fit perfectly into the rails of the trolley, and allow effortless handling: an end stop and a spring locking system allow the stretcher to be fixed to the trolley.

Dimensions Width 75 x Length 200 x Height with cover 120 cm

Load capacity 350 Kg

Weight 55 Kg (with stretcher and concealment)

Available options **Réf. 2420/L** Smooth pneumatic wheels diameter

Réf. 2420/P Notched wheels for all terrains (tarmac, gravel, earth, rough concrete)

Réf. 2420



SELF-PROPELLED TROLLEY FOR TRANSPORT WITH CONCEALMENT

Electric towed trolley with 4 wheels to go over all terrains (tarmac, gravel, earth, rough concrete), with drawbar guidance, able to tow up to 300kg on a 20% slope.

The concealment is composed of 4 removable stainless steel 304 hoops, dimension Φ 60 cm and height 30 cm, and a tunnel-shaped concealment cover with 2 closed ends, made of grey polyester fabric, easily cleaned and disinfected, and 2 straps to hold the body.

Features A powerful 800W motor, max speed 5km/h, forward and reverse, speed controllable, supplied with external battery charger, very low noise level. 1 key to start the device, battery charge indicator, anti-crushing belly security.

Dimensions Width 70 cm x Length 190 cm x Height with concealment 120 cm, trolley height 41 cm (the trolley tray lifts up to access the technical part).

Load capacity 300 Kg

Weight 130 Kg

Réf. 2410



TROLLEY FOR COFFIN HANDLING AND PRESENTATION

This trolley allows the handling of the empty coffin, and the presentation of the coffin in the ceremony room by folding down the trolley part. All stainless steel AISI 304 L, with a 25 x 25mm square tube structure, thickness 1.5mm, with 2 cross bars.

Compris A 30 x 20cm trolley support, 1 locking & unlocking pull cord, 4 swivel wheels 10cm, 2 of which have brakes, and 2 fixed wheels 10 cm diameter on the retractable part

Load capacity 230 kg

Réf. 1358



COFFIN TROLLEY

TROLLEY FOR COFFIN PRESENTATION

This fixed-height trolley is made of 304 stainless steel with a tray measuring 60 x 210 cm (W x L) and 30cm high (other heights on request). It is specially adapted for the presentation of the coffin: It has 4 swivel wheels of Φ 12,5cm, 2 of which have brakes and are mounted on plates, a removable handle on both sides (to be removed during the presentation) and a robe (optional) in fabric of a colour to be chosen, to conceal the underside of the trolley

Load capacity 300 Kg

Réf. 1355



TROLLEY FOR COFFIN TRANSPORT AND PRESENTATION

All stainless steel 304 transport or presentation trolley with 4 swivel wheels of Φ 12,5cm, 2 of which have brakes and 2 bars for placing the coffin, size 60 x 160 cm (W x L) and height 70cm (other heights on request).

Load capacity 250 Kg

Réf. 1356



FORKLIFT FOR COFFIN TRANSPORT AND PRESENTATION

This trolley has been designed for the transfer of coffins in hospitals, funeral homes and cemeteries. Its self-supporting structure in AISI 304 stainless steel is equipped with a hydraulic jack that allows it to be positioned at any height. A folding roller at one end facilitates the loading and unloading of the coffin from display tables, refrigeration units or funeral vehicles. The elevation is operated by means of a double foot pedal, with an easy and practical operation that allows a millimetric positioning. Electro-polished finish.

The stability of the coffin is guaranteed by non-slip rubber stops.

The manoeuvrability of the trolley is guaranteed by 4 large diameter semi-pneumatic wheels (20 cm,) two of which have brakes, allowing its use on rough floors.

Dimensions Folded length 114cm (unfolded 67,5cm) unfolded 60 cm x Height variable 34,5 à 106 cm

Weight 40 kg

Load capacity 220 Kg

Réf.1357



HYDROELECTRIC FORKLIFT FOR COFFIN

All stainless steel 304 brushed stainless steel finish with a single crossbar lifting system for strength and rigidity, and lifting by a hydraulic cylinder. With its electric control, fixed to the trolley, manoeuvring is made easy. It has a rechargeable battery with acid solution and an integrated charger and a brakeman to adjust the speed of descent. Optimised wheelbase: front - rear 145 cm and left - right 50cm - Very quiet hydraulic cylinder - A high and low limit switch - A safety lock on cylinder - 4 swivel wheels of Φ 12,5cm, 2 of which with brake (in order to block the trolley during its elevation) fixed on plates to support the weight of 350 kg without the wheels sagging. It is delivered as standard with a coffin roller **Réf. 2310.**

Dimensions Width 65 cm x Length 221,5 cm x Variable height 51 à 108 cm - Weight : 140 Kg

Load capacity 300 Kg

Options For coffin Ref.2313 Stainless steel frame with balls or **Ref.2312** Stainless steel tray with transport balls to facilitate the transfer of the coffin to the crematorium - Perfect stability during the maneuvering of the coffins.

Réf. 2200





TREATMENT TABLES



ISOCART® TROLLEY FOR TOILET AND STRETCHER CARE WITH ADJUSTABLE HEIGHT

It is specially adapted for conservation care by limiting manipulations, the stretcher is transferred from the cell to the tank by the access hatch via a forklift. The tank incorporates 2 side suction strips, in order to prevent the operator from inhaling harmful odors and vapours from the body, **in accordance with the new regulations on the reduction of the exposure limit to Formaldehyde.**

The Φ 200 mm exhaust nozzle is connected to the suction/filtration system by means of a flexible sheath. An drain plug and a drain pipe allow emptying into the floor drain.

To increase ergonomics, in addition to resting on a mobile base with 4 large Φ 12.5 cm swivel wheels, 2 of which have brakes, the height is variable from 73 to 103 cm : 2 battery-powered electric columns operated via a 2-button wired control activate the up/down function.

Not included Air extraction motor and connection duct

Dimensions 216 x 95 x height min 73 cm – max 103 cm **Load capacity** 300Kg

Réf. 3630 Isocart ® stretcher-mounted toilet with suction strips

ISOCART® TOILET AND CARE TROLLEY WITH SAFE HEIGHT ADJUSTMENT

It is specially adapted for conservation care and toilets, the body rests on 12 body rest bars to facilitate the dressing phase. The tank incorporates 1 central suction system, in order to prevent the operator from inhaling harmful odors and vapours from the body, **in accordance with the new regulations on the reduction of the exposure limit to Formaldehyde.**

The Φ 200 mm exhaust nozzle is connected to the suction/filtration system by means of a flexible sheath. A drain plug at the bottom of the tank and a drain pipe allow emptying into the floor drain.

To increase ergonomics, in addition to resting on a movable base with 4 large swivel wheels of Φ 12.5 cm including 2 with brakes, the height is variable from 73 to 103 cm: 2 electric columns powered by a battery and controlled via a 4-key wired control activate the function the ascent / descent.

Not included Air extraction motor and connection duct

Dimensions 200 x 80 x height min 73 cm – max 103cm **Load capacity** 300 Kg

Réf. 3631 Isocart ® toilet trolley

ISOCART® TROLLEY FOR TOILETS AND RITUAL TOILETS WITH ADJUSTABLE HEIGHT

It is specially adapted to toilets of all types, the deceased rests on 12 bars rests body to facilitate the different stages of the toilet (care / dressing). A drain plug at the bottom of the tank and a drain pipe allow emptying into the floor drain.

To increase ergonomics, in addition to resting on a movable base with 4 large swivel wheels of Φ 12.5 cm including 2 with brakes, the height is variable from 73 to 103 cm: 2 electric columns powered by a battery and controlled via a wired control 4 keys activate the function the ascent / descent.

Réf. 3632 Isocart ® trolley for normal and ritual toilets

Dimensions 200 x 80 x height min 73 cm – max 103cm **Load capacity** 300 Kg

Réf. 2500 Washing unit for ritual toilet

Dimensions 218 x 108 x height min 73 cm – max 103cm.

Load capacity 300 Kg

Including 2 sink trays: 1 horizontal 60 x 45 x 30cm (height) and 1 lateral 24 x 24 x 15cm (height) with drain and siphon, 1 hot/cold water mixer tap with elbow control, 1 cold water hand shower with 3m long hose, and 2 HDPE side protection strips



WASHING UNIT AND FURNITURE

DRAINAGE WASHING UNIT

Made of stainless steel 304, includes a sink tray with elbow control mixer and a drainage tray for the toilet with the stretcher on the trolley : equipped with a cold water tap, a shower head on a 3 m hose. The washing unit is used with a single trolley **réf 1350** or **1300** or lift **réf. 2350** or **2300** or **2260**.

Réf. 3500 Large

Dimensions Length 160 x H 75 (drainage side) 85 (washing side) x D 60 cm with backsplash of 5 and 15cm
2 basins of 42 x 37 x 20 cm (high)

Weight 50 Kg

Réf. 3550 Compact

Dimensions Length 100 x H 75 (drainage side) 85 (washing side) x D 45 cm with backsplash of 5 and 15cm
2 basins of 30 x 30 x 20 cm (high)

Weight 30 kg

Alternative Wall mounted **Réf.3550/M**

Réf. 3250 Simplified

it includes 1 large sink of 60 x 50 x 32 cm (high), with a hot/cold water mixer tap with elbow control and a hand shower with a 3 m hose.

Dimensions Length 70 x H 75 x D 70 cm with backsplash of 10cm - Weight 20 Kg

Alternative Wall mounted **Réf.3250/M**



WALL-MOUNTED HAND WASHER

Made of stainless steel 304, includes 1 sink tray of 33 x 23 x 13 cm (top), timed faucet with a pre-mixer hot / cold water with manual adjustment and a control panel at the knee.

Dimensions Length 40 x H 56 (Wall mounting) x D 34 cm with backsplash of 36cm - Weight 8 Kg

Alternative Fixation on 4 legs H 85cm **Réf.3285/P**

Réf. 3285 Packing : By unit with individual box

LOW STORAGE CABINET

It is made of stainless steel 304, and has a double top bench with a 10cm backsplash (photo without backsplash), 2 sliding doors with folding handles, 1 height adjustable shelf, 4 legs with adjustable jacks.

Series **Réf. 5200** Low storage cabinet

Dimensions 6 widths available : 100, 120, 140, 160, 180 and 200cm and 2 depths 60 et 70cm x height 85cm + backsplash of 10cm

Series **Réf. 3940** Cabinet with sink unit

With 1 or 2 sink trays of 40 x 40 x 20cm sink with elbow control mixer and a backsplash of 10cm

Dimensions 3 widths available : 120cm (1 basin), 140 and 160 cm (2 basins), and 2 depths 60 and 70cm x height 85cm + backsplash of 10cm



HIGH STORAGE CUPBOARD

It is made of stainless steel 304. It has 2 sliding doors with folding handles, 1 height-adjustable shelf and a fastening system at the back.

Dimensions 6 widths available : 100, 120, 140, 160, 180 and 200cm x depths 40cm x height 66cm

Séries **Réf. 5100** Width chosen to be specified



OPTION

Réf. 5100/C additional key lock for all the units Réf.5200, Réf.3940 et Réf.5100



REFRIGERATED COMPARTMENT

REFRIGERATED TRANSPORT COMPARTMENT IN FUNERAL

VEHICLE

The structure of the box is made of sandwich panel thickness 75 mm, rigid polyurethane foam insulation density 40 kg/m³, insulation value 0.346 W / mK compliant with CFC regulations, polyester skin coating washable inside to facilitate maintenance and cleaning. The door is of the tailgate type with gas cylinder, LED lighting on door contact and secure closing (by force).

Mounting of the group laterally, side door side. The group is equipped with a very powerful converter 12V / 230V is independent of the group, in order to feed the group either by the battery of the vehicle (while driving) or on the sector (while stopped). This configuration allows a very great flexibility of use for all the vehicles of transport with diesel engine and powerful alternator.

Cooling capacity 596 W, gas R 452A according to CFC regulation, power supply 12V or 230 Volts / 16A / 50 Hz, IP55 protection, nominal power 385W, 2,28A (absorption), hermetic refrigeration equipment protected by a safety device against over temperature: temperature range +2°C to +10°C for a maximum ambient temperature of +43°C, automatic temperature control, digital temperature display on the unit (optional possibility of transfer to the interior of the cabin), ventilated evaporator integrated in the unit and compact (fits only 7cm inside the cabinet), programmed automatic defrosting.



3 VERSIONS :

1 BODY FUNERAL COMPARTMENT

Before the coffin Secure system with a removable blocking device with quick fixing on an adjustable rack, 2 left and right guides for the stretcher, a removable bib : folding plate with quick fixing on both sides.

After the coffin Guiding the coffin on supporting balls to facilitate its sliding.

In accordance with the decree N°2000-191 of March 3, 2000 relating to the technical requirements applicable to the vehicles of refrigerated transport, approval CEMAFROID.


To equip with a raceway one body screwed on the floor of the box **Réf. 4430** all stainless steel 304 with 2 guide rails and a stretcher **Réf. 4400/60**

Réf. 4200 L

Dimensions W x H x D

Outside 95.6 x 75.6 x 227 cm (+25 cm for the group in width)

Interior 80 x 60 x 214.5 cm

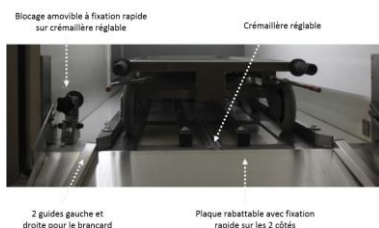

1 OBESE BODY FUNERAL COMPARTMENT

Before the coffin Secure system with a removable blocking device with quick fixing on an adjustable rack, 2 left and right guides for the stretcher, a removable bib : folding plate with quick fixing on both sides.

After the coffin Guiding the coffin on supporting balls to facilitate its sliding.

In accordance with the decree N°2000-191 of March 3, 2000 relating to the technical requirements applicable to the vehicles of refrigerated transport, approval CEMAFROID.


To equip with a raceway one body screwed on the floor of the box **Réf. 4430** all stainless steel 304 with 2 guide rails and a stretcher **Réf. 4400/60**

Réf. 4200 XL

Dimensions W x H x D

Outside 110.6 x 75.6 x 227 cm (+25 cm for the group in width)

Interior 100 x 60 x 214.5 cm

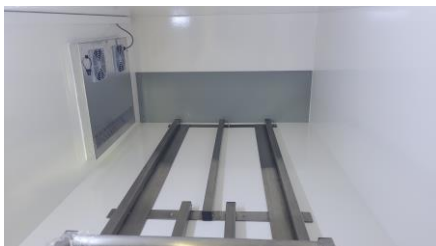



REFRIGERATED COMPARTMENT

2 BODY FUNERAL COMPARTMENT

Before the coffin Secure system with a removable blocking device with quick fixing on an adjustable rack, 2 left and right guides for the stretcher, a removable bib : folding plate with quick fixing on both sides.

After the coffin Guiding the coffin on supporting balls to facilitate its sliding.

In accordance with the decree N°2000-191 of March 3, 2000 relating to the technical requirements applicable to the vehicles of refrigerated transport, approval CEMAFROID.

To equip with a raceway 2 body screwed on the floor of the box **Réf. 4431** All stainless steel 304 with 2x2 guide rails and 2 stretchers **Réf. 4400/50**

Réf. 4200 2L

Dimensions W x H x D

Outside 120.6 x 75.6 x 227 cm (+25 cm for the group in width)

Interior 110 x 60 x 214.5 cm

Available option Ceiling unit (above the box, on the ceiling)



STRETCHER FOR REFRIGERATED BODY TRANSPORT IN A FUNERAL VEHICLE

Stretcher for standard or obese 1-body unit Ref. 4400/60 and for 2-body unit Ref. 4400/50. All stainless steel 304, made of 1,5mm tube offering a great solidity to the whole, reinforced and foldable. Its stretcher tray is curved (20mm) to facilitate the retention of liquids. It has 2 handles of pulling (one on each side) and 2 handles on the maneuvering side to activate the release of the 2 feet with removable casters. Its 2 legs are foldable thanks to gas compasses. It has 4 wheels of Φ 15cm, 2 of which are fixed and 2 swivel. It is equipped with 2 straps with quick closing and opening for the maintenance of the body during the transfers.

Included 2 brakes for locking the stretcher opposite the handles ; optional possibility to put a sophisticated locking.

Dimensions Width 60 (1 body) or 50 (2 bodies) x Height min 23 / max 73 x L 203 cm- Weight 40 Kg

Load capacity 220 Kg


Available option sophisticated blocking for stretcher wheels **Réf. 4400/BS**

Réf. 4400



LIFTING STRETCHER

Réf. 470 Packing : By unit - CF page 44

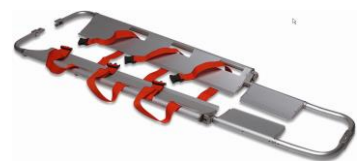

REINFORCED FLEXIBLE LIFTING STRETCHER

Flexible lifting stretcher made of welded PVC material, very resistant and thick with wooden slats. 6 handles and 3 straps inside. Available in 2 colors brown or black. The flexible stretcher is made of heavy PVC with thick wooden slats, the 3 internal straps and the large zipper facilitate the containment, the 6 handles allow to carry the body without difficulties.

It is equipped with a waterproof snap cover, which gives it the appearance of a standard first-call stretcher. The cover is interchangeable, lightweight and machine washable.

Dimensions 71 x 195,5 cm (W x L) - Weight 7 Kg

Réf 4400/FL **Load capacity** maximum 165 kg

Version or heavy body or obese : The reinforced stretcher is longer and constructed of heavier PVC with thicker wooden slats. The 5 internal straps and the large zipper facilitate the containment, the 6 handles allow to carry the body without difficulties.

Dimensions 71 x 213 cm (W x L) - Weight 13 Kg

Réf 4400/FXL **Load capacity** maximum 230 kg





COLD ROOM





PRESERVATION 1 TO 4 BODIES

CONSERVATION CELL FROM 1 TO 2 BODIES

Positive cold temperature for preservation of bodies at +4°C : T° range -5°C to +10°C, 60 mm thick panels, free passage door (H x W) 100 x 80 cm with 180° opening to the left or to the right, interior design all stainless steel 304 with 1 or 2 stretchers width 60cm

Refrigeration unit Monobloc, ceiling mounted

Dimensions (W x H x D) 112 x 132 x 218cm (+50cm for the unit in height)

Réf. 530281P All lacquered PET55µ front door

Réf. 630281P 304 stainless steel front

Réf. 730281P All stainless steel 304

Recommended option

Réf. 4280 Fixed base to install the cell, the height of the base is to be defined according to the transfer trolley

Réf. 4280/R Mobile base, if necessary to move the cell occasionally



FREEZING CELL FROM 1 TO 2 BODIES

Negative cold temperature for freezing bodies to -18°C : T° range -25°C to 0°C, 100 mm thick panels, free passage door (H x W) 100 x 80 cm with 180° opening to the left or to the right, interior design all stainless steel 304 with 1 or 2 stretchers width 60cm

Refrigeration unit Monobloc, ceiling mounted

Includes Heating cord on door leaf and pressure relief valve

Dimensions (W x H x D) 120 x 140 x 230cm (+50cm for the unit in height)

Réf. 530281NP All lacquered PET55µ front door

Réf. 630281NP 304 stainless steel front

Réf. 730281NP all stainless steel 304

Recommended option

Réf. 4280 Fixed base to install the cell, the height of the base is to be defined according to the transfer trolley

Réf. 4280/R Mobile base, if necessary to move the cell occasionally



CONSERVATION AND FREEZING CELL FROM 2 TO 4 BODIES

Positive and negative cold temperature for preservation and freezing of bodies : 1 to 2 bodies in positive cold temperature +2°C to +5°C (lower part), and 1 to 2 in negative cold temperature -10°C to -0°C (upper part), cell with separation between the negative and positive part and communicating between them via a forced air fan and a window. 60 mm thick panels, 2 free passage doors (H x W) 100 x 80 cm with 180° opening to the left or to the right, Interior fittings, double pair all stainless steel 304 with 2 or 4 stretchers width 60 cm

Refrigeration unit One single unit, ceiling mounted

Includes Heating cord on door leaf and pressure relief valve

Dimensions (W x H x D) 120 x 270 x 230cm (+40cm for the unit in height)

Réf. 540482DAP All lacquered PET55µ front door

Réf. 640482DAP 304 stainless steel front

Réf. 740482DAP all stainless steel 304

Variant 2 groups One positive side and one negative ceiling or side **Réf. 540482DAG**
or In split offset at less than 15m (one or two groups) **Réf. 540482DAS**

AVAILABLE OPTIONS

Coating **Réf. 50000/PR** Extra grey hard PVC coating (ACROVYN) on the door façade

Stretchers Choice of 1 or 2 in 60cm width, flat **Réf. 1560** or curved **Réf. 1561**
With added value, **Réf. 1571** 1 or 2 curved stretcher(s) width 75cm

Other free passages

Width 62 cm

Width 100 cm with stretchers width 75cm included

Group variant For the 2-body cell

Lateral

In Split system remote to less than 15 meters





PRESERVATION 3 TO 4 BODIES

CONSERVATION AND FREEZING CELL 4 BODIES

Positive and negative cold temperature for preservation and freezing of bodies : 3 bodies in positive cold temperature +2°C to +5°C (lower part), and 1 in negative cold -10°C to -0°C (upper part), cell with separation between the negative and positive part and communicating between them via a forced air fan and a window, 60 mm thick panels, 2 free passage doors (H x W) 152 x 80 cm (positive) and 62 x 80 cm (negative), with 180° opening to the left or to the right, All lacquered PET55µ front door finish. Interior fittings, double pair all stainless steel 304 with 4 stretchers width 60 cm.

Refrigeration unit One single unit, ceiling mounted

Includes Heating cord on door leaf and pressure relief valve

Dimensions (W x H x D) 112 x 252 x 218cm (+40cm for the unit in height)

Réf. 550482DP All lacquered

Réf. 650482DP 304 stainless steel front

Réf. 750482DP all stainless steel 304

Cell variant 100 mm thick panels, dimensions (W x H x D) 120 x 260 x 230cm (+40cm for the group in height)

Réf. 550482DA All lacquered

Réf. 650482DA 304 stainless steel front

Réf. 750482DA all stainless steel 304



CONSERVATION AND FREEZING CELL 3 BODIES

Positive and negative cold temperature for preservation and freezing of bodies : 2 bodies in positive cold temperature +2°C to +5°C (lower part), and 1 in negative cold -10°C to -0°C (upper part), cell with separation between the negative and positive part and communicating between them via a forced air fan and a window, 60 mm thick panels, 2 free passage doors (H x W) 110 x 80 cm (positive) and 62 x 80 cm (positive), with 180° opening to the left or to the right, All lacquered PET55µ front door finish. Interior fittings, double pair all stainless steel 304 with 4 stretchers width 60 cm.

Refrigeration unit One single unit, ceiling mounted

Includes Heating cord on door leaf and pressure relief valve

Dimensions (W x H x D) 112 x 212 x 218cm (+40cm for the unit in height)

Réf. 550382DP All lacquered

Réf. 650382DP 304 stainless steel front

Réf. 750382DP all stainless steel 304

Cell variant 100 mm thick panels, dimensions (W x H x D) 120 x 260 x 230cm (+40cm for the group in height)

Réf. 550382DA All lacquered

Réf. 650382DA 304 stainless steel front

Réf. 750382DA all stainless steel 304



AVAILABLE OPTIONS

Coating **Réf. 50000/PR** Extra grey hard PVC coating (ACROVYN) on the door façade

Stretchers Choice of 1 or 2 in 60cm width, flat **Réf. 1560** or curved **Réf. 1561**
With added value, **Réf. 1571** Curved stretcher width 75cm

Group variant

With 2 groups: A lateral positive and a ceiling or side negative
Or in Split deported to less than 15m (one or two groups to be specified)

Other free passages

Width 62 cm

Width 100 cm with stretchers width 75cm included



PRESERVATION 2 TO 9 BODIES – GATES



CONSERVATION CELL 2 BODIES WITH GATES

Positive cold temperature for preservation of bodies at +4 °C : T° range -5 °C to +10 °C, 60 mm thick panels, 2 free passage gates (H x W) 55 x 62 cm with 180° opening on the left or right, interior design all stainless steel 304 with 2 stretchers width 60cm

Refrigeration unit Monobloc, side-mounted rider

Dimensions (W x H x D) 92 x 212 x 218cm (+30cm for the unit in width)

Réf. 500262C All lacquered PET55µ front door

Réf. 600262C 304 stainless steel front

Réf. 700262C All stainless steel 304

Cell variant Negative cold temperature -25 °C to -0 °C, 100 mm thick panels

Dimensions (W x H x D) 100 x 220 x 230cm (+30cm for the unit in width)

Réf. 500262NC All lacquered PET55µ front door

Réf. 600262NC 304 stainless steel front

Réf. 700262NC All stainless steel 304

CONSERVATION CELL 4 BODIES WITH GATES

Positive cold temperature for preservation of bodies at +4 °C : T° range -5 °C to +10 °C, 60 mm thick panels, 4 free passage gates (H x W) 55 x 62 cm with 180° opening on the left or right, interior design all stainless steel 304 with 4 stretchers width 60cm

Refrigeration unit Monobloc, side-mounted rider

Dimensions (W x H x D) 172 x 212 x 218cm (+30cm for the unit in width)

Réf. 500464C All lacquered PET55µ front door

Réf. 600464C 304 stainless steel front

Réf. 700464C All stainless steel 304

Cell variant Negative cold temperature -25 °C to -0 °C, 100 mm thick panels

Dimensions (W x H x D) 100 x 220 x 230cm (+30cm for the unit in width)

Réf. 500464NC All lacquered PET55µ front door

Réf. 600464NC 304 stainless steel front

Réf. 700464NC All stainless steel 304

CONSERVATION CELL 6 BODIES WITH GATES

Positive cold temperature for preservation of bodies at +4 °C : T° range -5 °C to +10 °C, 60 mm thick panels, 6 free passage gates (H x W) 55 x 62 cm with 180° opening on the left or right, interior design all stainless steel 304 with 6 stretchers width 60cm

Refrigeration unit Monobloc, side-mounted rider

Dimensions (W x H x D) 252 x 212 x 218cm (+30cm for the unit in width)

Réf. 500666C All lacquered PET55µ front door

Réf. 600666C 304 stainless steel front

Réf. 700666C All stainless steel 304

Cell variant Negative cold temperature -25 °C to -0 °C, 100 mm thick panels

Dimensions (W x H x D) 100 x 220 x 230cm (+30cm for the unit in width)

Réf. 500666NC All lacquered PET55µ front door

Réf. 600666NC 304 stainless steel front

Réf. 700666NC All stainless steel 304

AVAILABLE OPTIONS

Coating **Réf. 50000/PR** Extra grey hard PVC coating (ACROVYN) on the door façade

Stretchers Choice, width 60cm, flat **Réf. 1560** or curved **Réf. 1561**
For cells with door opening in 80 with added value, or 100cm : curved stretcher in width 75cm **Réf. 1571**

Other free passages

Width 62 cm

Width 100 cm with stretchers width 75cm included

Group variant Lateral
In Split system remote to less than 15 meters





PRESERVATION 2 TO 9 BODIES – GATES

CONSERVATION CELL 3 BODIES WITH GATES

Positive cold temperature for preservation of bodies at +4°C : T° range -5°C to +10°C, 60 mm thick panels, 3 free passage gates (H x W) 55 x 62 cm with 180° opening on the left or right, interior design all stainless steel 304 with 3 stretchers width 60cm

Refrigeration unit Monobloc, side-mounted rider

Dimensions (W x H x D) 92 x 252 x 218cm (+30cm for the unit in width)

Réf. 550363C All lacquered PET55µ front door **Réf. 650363C** 304 stainless steel front **Réf. 750363C** All stainless steel 304

Cell variant Negative cold temperature -25°C to -0°C, 100 mm thick panels

Dimensions (W x H x D) 100 x 260 x 230cm (+30cm for the unit in width)

Réf. 550363NL All lacquered PET55µ front door **Réf. 650363NL** 304 stainless steel front **Réf. 750363NL** All stainless steel 304



VERTICAL CONSERVATION CELL 6 BODIES WITH GATES

Positive cold temperature for preservation of bodies at +4°C : T° range -5°C to +10°C, 60 mm thick panels, 6 free passage gates (H x W) 55 x 62 cm with 180° opening on the left or right, interior design all stainless steel 304 with 6 stretchers width 60cm

Refrigeration unit Monobloc, side-mounted rider

Dimensions (W x H x D) 172 x 252 x 218cm (+30cm for the unit in width)

Réf. 550666C All lacquered PET55µ front door **Réf. 650666C** 304 stainless steel front **Réf. 750666C** All stainless steel 304

Cell variant Negative cold temperature -25°C to -0°C, 100 mm thick panels

Dimensions (W x H x D) 180 x 260 x 230cm (+30cm for the unit in width)

Réf. 550666NL All lacquered PET55µ front door **Réf. 650666NL** 304 stainless steel front **Réf. 750666NL** All stainless steel 304



CONSERVATION CELL 9 BODIES WITH GATES

Positive cold temperature for preservation of bodies at +4°C : T° range -5°C to +10°C, 60 mm thick panels, 6 free passage gates (H x W) 55 x 62 cm with 180° opening on the left or right, interior design all stainless steel 304 with 6 stretchers width 60cm

Refrigeration unit Monobloc, side-mounted rider

Dimensions (W x H x D) 252 x 252 x 218cm (+30cm for the unit in width)

Réf. 550969C All lacquered PET55µ front door **Réf. 650969C** 304 stainless steel front **Réf. 750969C** All stainless steel 304

Cell variant Negative cold temperature -25°C to -0°C, 100 mm thick panels

Dimensions (W x H x D) 260 x 260 x 230cm (+30cm for the unit in width)

Réf. 550969NL All lacquered PET55µ front door **Réf. 650969NL** 304 stainless steel front **Réf. 750969NL** All stainless steel 304



AVAILABLE OPTIONS

Coating **Réf. 50000/PR** Extra grey hard PVC coating (ACROVYN) on the door façade

Stretchers Choice, width 60cm, flat **Réf. 1560** or curved **Réf. 1561**
For cells with door opening in 80 with added value, or 100cm : curved stretcher in width 75cm **Réf. 1571**

Other free passages

Width 62 cm
Width 100 cm with stretchers width 75cm included

Group variant Lateral
In Split system remote to less than 15 meters



PRESERVATION 3 TO 15 BODIES – DOOR

CONSERVATION CELL 3 BODIES WITH 1 DOOR, EXTENDABLE TO 4

Positive cold temperature for preservation of bodies at +4 °C : T° range -5 °C to +10 °C, 60 mm thick panels, 1 free passage door (H x W) 182 x 80 cm, with 180° opening on the left or right, interior design all stainless steel 304 with 3 stretchers width 60cm.

Refrigeration unit Monobloc, side-mounted rider

Dimensions (W x H x D) 92 x 212 x 218cm (+30cm for the unit in width)

Réf. 500381C All lacquered PET55µ front door **Réf. 600381C** 304 stainless steel front **Réf. 700381C** All stainless steel 304

Expandable to 4 bodies With the addition of 1 stretchers and 1 KITRAIL, ceiling unit required

Réf. 500481P All lacquered PET55µ front door **Réf. 600481P** 304 stainless steel front **Réf. 700481P** All stainless steel 304

Cell variant Negative cold temperature -25 °C to -0 °C, 100 mm thick panels

Dimensions (W x H x D) 120 x 220 x 230cm (+30cm for the unit in width).

Réf. 500381N All lacquered PET55µ front door **Réf. 600381N** 304 stainless steel front **Réf. 700381N** All stainless steel 304



CONSERVATION CELL 6 BODIES WITH 2 DOOR, EXTENDABLE TO 8

Positive cold temperature for preservation of bodies at +4 °C : T° range -5 °C to +10 °C, 60 mm thick panels, 2 free passage door (H x W) 182 x 80 cm, with 180° opening on the left or right, interior design all stainless steel 304 with 6 stretchers width 60cm.

Refrigeration unit Monobloc, side-mounted rider

Dimensions (W x H x D) 212 x 212 x 218cm (+30cm for the unit in width)

Réf. 500682C All lacquered PET55µ front door **Réf. 600682C** 304 stainless steel front **Réf. 700682C** All stainless steel 304

Expandable to 8 bodies With the addition of 2 stretchers and 2 KITRAIL, ceiling unit required

Réf. 500882P All lacquered PET55µ front door **Réf. 600882P** 304 stainless steel front **Réf. 700882P** All stainless steel 304

Cell variant Negative cold temperature -25 °C to -0 °C, 100 mm thick panels

Dimensions (W x H x D) 220 x 220 x 230cm (+30cm for the unit in width)

Réf. 500682N All lacquered PET55µ front door **Réf. 600682N** 304 stainless steel front **Réf. 700682N** All stainless steel 304



CONSERVATION CELL 9 BODIES WITH 3 DOOR, EXTENDABLE TO 12

Positive cold temperature for preservation of bodies at +4 °C : T° range -5 °C to +10 °C, 60 mm thick panels, 3 free passage door (H x W) 182 x 80 cm, with 180° opening on the left or right, interior design all stainless steel 304 with 9 stretchers width 60cm.

Refrigeration unit Monobloc, side-mounted rider

Dimensions (W x H x D) 312 x 212 x 218cm (+30cm for the unit in width)

Réf. 500983C All lacquered PET55µ front door **Réf. 600983C** 304 stainless steel front **Réf. 700983C** All stainless steel 304

Expandable to 12 bodies With the addition of 3 stretchers and 3 KITRAIL, ceiling unit required

Réf. 501283P All lacquered PET55µ front door **Réf. 601283P** 304 stainless steel front **Réf. 701283P** All stainless steel 304

Cell variant Negative cold temperature -25 °C to -0 °C, 100 mm thick panels

Dimensions (W x H x D) 320 x 220 x 230cm (+30cm for the unit in width)

Réf. 500982N All lacquered PET55µ front door **Réf. 600982N** 304 stainless steel front **Réf. 700982N** All stainless steel 304

AVAILABLE OPTIONS

Coating **Réf. 50000/PR** Extra grey hard PVC coating (ACROVYN) on the door façade

Stretchers Choice, width 60cm, flat **Réf. 1560** or curved **Réf. 1561**
With added value, **Réf. 1571** Curved stretcher width 75cm

Other free passages

Width 62 cm
Width 100 cm with stretchers width 75cm included

Group variant Lateral
In Split system remote to less than 15 meters



PRESERVATION 3 TO 15 BODIES – DOOR

CONSERVATION CELL 4 BODIES WITH 1 DOOR, EXTENDABLE TO 5

Positive cold temperature for preservation of bodies at +4°C: T° range -5°C to +10°C, 60 mm thick panels, 1 free passage door (H x W) 220 x 80 cm with 180° opening on the left or right, interior design all stainless steel 304 with 4 stretchers width 60cm.

Refrigeration unit Monobloc, side-mounted rider

Dimensions (W x H x D) 112 x 252 x 218cm (+30cm for the unit in width)

Réf. 550481C All lacquered PET55µ front door **Réf. 650481C** 304 stainless steel front **Réf. 750481C** All stainless steel 304

Expandable to 5 bodies With the addition of 1 stretchers and 1 KITRAIL, ceiling unit required

Réf. 550581P All lacquered PET55µ front door **Réf. 650581P** 304 stainless steel front **Réf. 750581P** All stainless steel 304

Cell variant Negative cold temperature -25°C to -0°C, 100 mm thick panels

Dimensions (W x H x D) 120 x 260 x 230cm (+30cm for the unit in width)

Réf. 550481N All lacquered PET55µ front door **Réf. 650481N** 304 stainless steel front **Réf. 750481N** All stainless steel 304



CONSERVATION CELL 8 BODIES WITH 2 DOOR, EXTENDABLE TO 10

Positive cold temperature for preservation of bodies at +4°C: T° range -5°C to +10°C, 60 mm thick panels, 2 free passage door (H x W) 220 x 80 cm with 180° opening on the left or right, interior design all stainless steel 304 with 8 stretchers width 60cm.

Refrigeration unit Monobloc, side-mounted rider

Dimensions (W x H x D) 212 x 252 x 218cm (+30cm for the unit in width)

Réf. 550882C All lacquered PET55µ front door **Réf. 650882C** 304 stainless steel front **Réf. 750882C** All stainless steel 304

Expandable to 10 bodies With the addition of 2 stretchers and 2 KITRAIL, ceiling unit required

Réf. 551082P All lacquered PET55µ front door **Réf. 651082P** 304 stainless steel front **Réf. 751082P** All stainless steel 304

Cell variant Negative cold temperature -25°C to -0°C, 100 mm thick panels

Dimensions (W x H x D) 220 x 260 x 230cm (+30cm for the unit in width)

Réf. 550882N All lacquered PET55µ front door **Réf. 650882N** 304 stainless steel front **Réf. 750882N** All stainless steel 304

CONSERVATION CELL 12 BODIES WITH 3 DOOR, EXTENDABLE TO 15

Positive cold temperature for preservation of bodies at +4°C: T° range -5°C to +10°C, 60 mm thick panels, 2 free passage door (H x W) 220 x 80 cm with 180° opening on the left or right, interior design all stainless steel 304 with 12 stretchers width 60cm.

Refrigeration unit Monobloc, side-mounted rider

Dimensions (W x H x D) 312 x 252 x 218cm (+30cm for the unit in width)

Réf. 551283C All lacquered PET55µ front door **Réf. 651283C** 304 stainless steel front **Réf. 751283C** All stainless steel 304

Expandable to 10 bodies With the addition of 3 stretchers and 3 KITRAIL, ceiling unit required

Réf. 551583P All lacquered PET55µ front door **Réf. 651583P** 304 stainless steel front **Réf. 751583P** All stainless steel 304

Cell variant Negative cold temperature -25°C to -0°C, 100 mm thick panels

Dimensions (W x H x D) 220 x 260 x 230cm (+30cm for the unit in width)

Réf. 551283N All lacquered PET55µ front door **Réf. 651283N** 304 stainless steel front **Réf. 751283N** All stainless steel 304



AVAILABLE OPTIONS

Coating **Réf. 50000/PR** Extra grey hard PVC coating (ACROVYN) on the door façade

Stretchers Choice, width 60cm, flat **Réf. 1560** or curved **Réf. 1561**

With added value, **Réf. 1571** Curved stretcher width 75cm

Other free passages

Width 62 cm

Width 100 cm with stretchers width 75cm included

Group variant

Lateral

In Split system remote to less than 15 meters



CONSERVATION 1 TO 3 BODIES – SIDE DOORS



CONSERVATION CELL 3 BODIES WITH DOUBLE LEAF SIDE DOOR

This cell is suitable for rooms where the depth is insufficient, and the clearance in front is not large enough for the passage of the forklift and the cell (212 + 280 cm) minimum. Its shallow depth of 92cm (without the leaves) allows for optimal use of the available space. Side loading with the specific forklift truck (Ref. 2350L) reduces the travel required in front of the cell when handling the body. The space required is 250cm instead of 500cm. The two flaps open up to 180°, the left flap opens to the left and the right flap to the right. **The floor must be perfectly horizontal, in order to adjust the 2 leaves correctly.**

Positive cold temperature for preservation of bodies at +4 °C : T° range -5 °C to +10 °C, 60 mm thick panels, 1 free passage door (H x W) 182 x 210 cm with opening of the leaves to the left and right at 180 °, interior design all stainless steel 304 with 3 stretchers width 60cm.

Refrigeration unit Monobloc, side-mounted rider

Dimensions (W x H x D) 252 x 212 x 98cm (+30cm for the unit in width)

Réf. 5003L2C All lacquered PET55µ front door

Réf. 6003L2C 304 stainless steel front

Réf. 7003L2C All stainless steel 304

Possible arrangement in 2 bodies Without other modification than the interior layout for 2 bodies with 2 stretchers width 60 cm.

Réf. 5002L2C All lacquered PET55µ front door

Réf. 6002L2C 304 stainless steel front

Réf. 7002L2C All stainless steel 304

Cell variant Negative cold temperature -25 °C to -0 °C, 100 mm thick panels

Dimensions (W x H x D) 260 x 220 x 110cm (+30cm for the unit in width)

Réf. 5003L2N All lacquered PET55µ front door

Réf. 6003L2N 304 stainless steel front

Réf. 7003L2N All stainless steel 304

AVAILABLE OPTIONS

Coating

Réf. 50000/PR Extra grey hard PVC coating (ACROVYN) on the door façade

Stretchers Choice, width 60cm,
flat **Réf. 1560**
or curved **Réf. 1561**

Group variant Lateral
In Split system remote to less than 15 meters





EVOLVING CELL

WITH LARGE DOORS OR GATES WITH POSITIVE OR NEGATIVE COLD TEMPERATURE

Range from -5°C to $+10^{\circ}\text{C}$, 60 mm thick panels (optional 100 mm for hot or humid areas), free passage door with height of 182 or 220 cm and width of 62 or 80 or 100 cm with 180° opening on the left or right, or single door free passage height of 55 cm and width of 62 or 80 or 100 cm with left or right 180° opening.

Possible depth of 200, 220 or 240 cm inside (especially for oversize coffins).

Possibility of mixing positive (range from -5°C to $+10^{\circ}\text{C}$) and negative (range from -25°C to 0°C) refrigeration by using 100mm thick panels and a vertical separation wall between the positive and negative compartments (one unit per compartment)

Interior design all stainless steel 304 from 2 to 5 levels, with stretchers
Ref.1560 or 1561 or 1571.

Refrigeration unit Monobloc, side-mounted and optional ceiling-mounted or split system (Attention the location of the evaporator inside the cell eliminates 1 body in a row).

Possible finishes

All lacquered PET55 μ front door
304 stainless steel front
All stainless steel 304

Option Extra grey hard PVC coating (ACROVYN) on the door façade



OBESSE BODIES CONSERVATION CELL WITH SPECIAL "GIGOGNE" TYPE TROLLEYS


Positive cold temperature cell

Free passage width 120 cm x variable height from 200 to 240 cm x variable depth from 200 to 240 cm.

Cell with floor (provide stainless steel threshold for the step) or without floor with scraper brush under the door. Without floor with free passage 120 cm allowing to store :

2 "gigogne" type trolleys of different fixed heights with stretcher tray welded on the trolley, 2 handles for handling the trolley, 4 swivel wheels, 2 with brake, mounted on plates to allow a permissible load of 350 Kg.



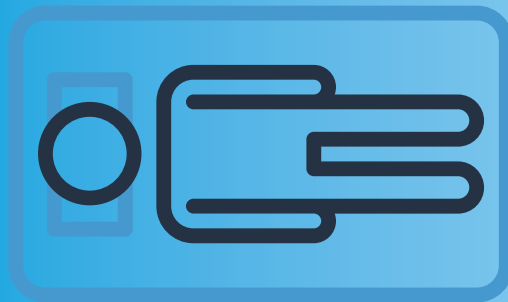

AUTOPSY AND LABORATORY





AUTOPSY TABLES



PREPARATION TABLE AND RITUAL TOILETS

Table adapted to the preparation of the deceased, conservation care, and also ritual toilets. It is equipped with a large sink bowl, a mixer tap with elbow control and an EF hand shower with 3m long flexible hose, a permanent rinse tap, a drain with removable basket and a siphon, a 230V/50Hz electrical socket and 3 body supports with length-adjustable positions. Table made of stainless steel 304, smooth, without roughness which facilitates cleaning.

Dimensions Length 250 x width 75 x Height 85 cm - Weight 70 Kg

Available options **Ref. 3611** 2 leg coverings, **Ref. 3610/RO** 4 wheels of 12.5 cm on platinum and **Ref. 3600** Reinforced table with rounded edges of 70mm, tray 40 x 40 x 20cm, worktop thickness 15/10 °, with possibility of tray in 316L

Réf. 3610



AUTOPSY TABLE, CENTRAL FOOT

Table adapted for autopsies.

It is equipped with a large sink bowl, a mixer tap with elbow control and an EF hand shower with 4m long flexible hose, a permanent rinse tap, a drain with overflow and siphon, a 230V/50Hz electrical socket and 3 body supports. Its wide base of 142 x 72 cm gives it great stability. Table made of stainless steel 304, smooth, without roughness which facilitates cleaning.

Réf. 3700 Table with fixed height

Dimensions Length 270 x width 80 (option 90cm) x Height 85 cm - Weight 200 Kg

Available options **Réf. 3700/16** Autopsy tray stainless steel 316L, **Réf. 3750** With electrically variable height from 73 to 103 cm

Réf. 3800 With variable height and integrated suction in the base

Its ergonomics are optimized by adjusting its height electrically from 73 to 103 cm. For ease of use, it is equipped with an odor suction system that is filtered by a powerful turbine incorporated.



Dimensions Length 290 x width 80 cm (option 90 cm) x Height 73 to 103 cm - Weight 220 Kg.

Load capacity 300 Kg

Available variant **Réf. 3800/F** Fixed height of 85cm

Available options **Réf. 3800/G** Graduation from 0 to 200cm, **Réf. 3800/B** Crusher under the sink, **Réf. 3800/PA** Basket under the sink H 10cm hole diameter 3mm, **Réf. 3800/H** Hydroaspirator for aspiration of liquids from the autopsy, **Réf. 3800/R** Rotation of the table to + or - 90°, **Réf. 3800/D** Cutting board 60 x 80 x 2,5cm

VARIABLE HEIGHT AUTOPSY TABLE, DOUBLE BASE

Table adapted for autopsies and conservation care.

It is equipped with a large sink bowl, a mixer tap with elbow control and an EF hand shower with 4m long flexible hose, a permanent rinse tap, a drain with overflow and siphon, a 230V/50Hz electrical socket and 3 body supports with length-adjustable positions.

It has the particularity of the central space hollowed out to free the movement of the user around the table. It also has two large shelves for accessories.

Its ergonomics are optimized by adjusting its height electrically from 73 to 103 cm.

Table made of stainless steel 304, smooth, without roughness which facilitates cleaning.

Dimensions Length 260 x width 80 x Height 73 à 103 cm - Weight 220 Kg. Charge admissible 300 Kg

Available options **Réf. 3850/16** Plateau d'autopsie en inox 316L

Ref. 3850





AUTOPSY TABLE, PERFORATED TOP WITH VARIABLE HEIGHT AND INTEGRATED SUCTION, CENTRAL BASE

Table adapted for autopsies, with 4 removable perforated trays for the flow of liquids and the aspiration of odors.

It is equipped with a large sink bowl, a mixer tap with elbow control and an EF hand shower with 4m long flexible hose, a permanent rinse tap, a drain with overflow and siphon, a 230V/50Hz electrical socket.

Its wide base of 142 x 72 cm gives it great stability. Its ergonomics are optimized by adjusting its height electrically from 73 to 103 cm.

For ease of use, it is equipped with an odor suction system that is filtered by a powerful incorporated turbine.

Top made of stainless steel 316, the rest is in stainless steel 304

Dimensions Length 270 x width 90 cm (option 80cm) x Height 73 to 103 cm - Weight 220 Kg.

Load capacity 300 Kg

Available variant Réf. 3810/F Hauteur fixe de 85cm

Available options Réf. 3800/G Graduation from 0 to 200cm, Réf. 3800/B Crusher under the sink, Réf. 3800/PA Basket under the sink H 10cm hole diameter 3mm, Réf. 3800/H Hydroaspirator for aspiration of liquids from the autopsy, Réf. 3800/R Rotation of the table to + or - 90°, Réf. 3800/D Cutting board 60 x 80 x 2,5cm

Ref. 3810



BODY WEIGHING ON AUTOPSY TABLE

Weighing of the body directly on the autopsy table, thanks to 4 sensors integrated into the moving part and the digital display, it weighs from 10 to 300 kg.

The I 20 display is robust, waterproof and easy to maintain, placed in its stainless steel case. It is easy to use and very readable.

Réf. 3800/P

Attention This weighing system can only be installed on a table with central base type 3700, 3750, 3800 or 3810



ANTHROPOMETRY KIT

Set consisting of:

- 1 Caliper (Poech type) to determine the absolute and projected face, measuring range from 0 to 250mm,
- 1 Digital caliper to determine absolute and projected face, measuring range from 0 to 150mm,
- 1 Cephalometric compass : a pointed thickness compass for determining the absolute and projected face, measuring range 0 to 250mm,
- 1 Improved black mandibulometer for mandibular studies,
- 1 Osteometry table : PVC, dimensions L 60 x width 25 cm, to measure the length and height of a bone.

Réf. 3800/ANT Packing : By set with individual box





DISSECTION AND PLENUM



DISSECTION TABLE, CENTRAL FOOT AND SUCTION

Table suitable for dissection, with 2 removable trays perforated except in the center, at the level of the organ for the flow of liquids and the aspiration of odors.

It is equipped with a large sink bowl, a mixer tap with elbow control and an EF hand shower with 3m long flexible hose, a permanent rinse tap, a drain with removable basket and a siphon, a 230V/50Hz electrical socket. Its wide base of 132 x 51 cm ensures great stability.

Top made of stainless steel 316, the rest is in stainless steel 304

Dimensions Length 200 x width 70 x Height 85 cm - Weight 150 Kg

Available options **Réf. 3110/V** Dissection table with variable height from 73 to 103cm and **Réf. 502120** Air extraction with filtration box

Réf. 3110



DISSECTION TABLE NEXT TO THE AUTOPSY TABLE

Table made of stainless steel 304, fixed to the autopsy table (adjoined), with a direct flow into the tank (thanks to a slope), equipped with a removable stainless steel grid. Tray thickness 15/10 °.

Dimensions Length 79 x width 53 cm - Weight 30 Kg

Available variant **Réf. 3111/E** Same adjoining and attached to the autopsy table, but with air extraction at the periphery, connected to the extraction network of the autopsy table **Réf. 3800** or **Réf. 3810**

Available options **Réf. 3800/D** Cutting board 60 x 80 x 2,5cm

Réf. 3111



DISSECTION TABLE, INDEPENDENT, ATTACHED TO AUTOPSY TABLE

Table made of stainless steel 304, fixed height 85 cm (or height on request), to be attached to the autopsy table.

Its practical work surface can be positioned behind or to the side of the autopsy table tray. It can also be used as a sideboard for autopsy instruments (on cutting board **Réf. 3800/D**).

The recovery of flows is done under the table, via a discharge tube, extendable from 30 to 60cm and diameter 32cm (**Réf. 3300/ET** Etiroflex), with one end screwed to the drain underneath, and the other end fitting into the floor drain or a separate canister.

Tray thickness 10/10°.

Dimensions Length 80 x width 60 x Height 85 cm (For other dimensions, contact us)

Weight 30 Kg

Réf. 3112



DISSECTING TABLE, TO BE PLACED ON THE AUTOPSY TABLE

Table made of stainless steel 304, to be placed on the autopsy table.

In 2 parts: a work surface and a collection tray with 4 legs, spaced so that it fits into the autopsy table top. The part of the foot, in contact with the table, is reinforced with a HDPE leg to facilitate sliding on the table. Its worktop in stainless steel 304 thickness 10/10°, placed behind the tank of the autopsy table, recovery of the draining on the table. The worktop is removable, and allows the cleaning of the recovery tank. The evacuation of the liquids is done thanks to the drain of the recovery tank, via a flexible pipe fixed to one of the 4 feet

Tray thickness 10/10°.

Dimensions Length 70 x width 40 x Height 25 cm - Weight 15 Kg

Réf. 3113



DISSECTION AND PLENUM

DISSECTING TABLE, INDEPENDENT AND WITH VARIABLE HEIGHT

Table made of stainless steel 304, its worktop is made of stainless steel 304 thickness 15/10 °, mobile on 4 swivel wheels (2 with brake).

The variable height table adjusts to the worktop and the desired height, equipped with a cutting board and a perforated grid that allows the flow of liquids more easily. The recovery of flows can be carried out by a stretch hose connected directly into the floor siphon or into a 20-litre canister. Its flat base is used as a shelf and allows storage.

Dimensions Length 80 x width 60 x Height 60 à 90 cm - Approximately weight 50 Kg

Ref. 3114

**PLENUM WITH ILLUMINATING BLOWING FOR AUTOPSY TABLE**

It is designed to protect the operator by creating a laminar flow around the table, channelling noxious vapors towards the table's suction system, limiting vapors and aerosol projections towards users. Made of 304 stainless steel, thickness 15/10°, brushed finish 220 grain, equipped with LED lights, adjustable deflectors, 4 LED lights, T° 4000K and power 40W each.

Included 2 rows of air nozzles arranged on 4 sides, the air flow from the nozzles can be directed at an angle of +/- 15°, 72 nozzles 125 x 12 spaced 50mm apart, 2 air inlets 196mm in diameter, 4 LED 230V lights 45W 4000K - IP40 and dimensions 1195 x 295mm and 4 ceiling suspension brackets (taken up with M8 threaded rods). Adjustable deflectors direct the airflow onto the autopsy tabletop.

Dimensions Length 232 x width 82 x Height 25 cm - Approximately weight 150 Kg

Alternative Plenum for table width 90cm, in L shape for autopsy and dissection table set width 80 or for autopsy table width 90 **Réf. 3800/PSEL**

Réf. 3800/PSE

**BANDEAU D'ASPIRATION POUR EXTRACTION D'AIR**

The headband is designed to protect the operator from formalin vapors while working. These oblong holes allow the air flow to be extracted from the work table. It is made of stainless steel 304, it has a front panel with a perforated plate (oblong 2x20 horizontal direction) in the lower part. Height of the front panel 15 cm. It is composed of an upper plenum height 150mm with a plate of distribution of the aspiration, a trapdoor of visit screwed on the sides and a connection hood with trapezoidal cross-section for connection to a type H14 filter on F353 flange with dimensions to be confirmed (photo external dimension 71 x40.5cm) located at 196cm/floor. Sliding construction between headband and connection hood with trapezoidal cross-section.

Dimensions

Extraction band : width de 100 à 400 cm x Height 37cm x depth 15cm

Chimney : width 71cm x Height 69cm x depth 15 à 40,5cm

Chimney outlet : width 71cm x depth 40,5cm

Chimney inlet : width 71cm x depth 15cm

Réf. 5510/B

**SUCTION BACKSPASH**

Captures noxious vapors from conservation care as close as possible to the work area.


Includes 4 suction zones and a Ø 200mm spigot for a suction/filtration box above.

Wall-mounted with 2 support feet to the floor, height of feet 100 cm so that the hood is just above the cart with the body (recommended height 150cm) : height to be determined according to the technical room.

Made of 304 stainless steel

Dimensions Length 150 x width 150 x H 30 cm, Hood height 80 cm

Réf. 3634

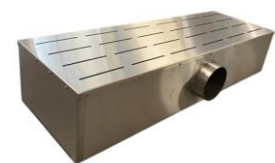



LABORATORY FURNITURE



WET BENCH FOR LABORATORY

This wet bench has a sink tray size 40 x 50 x 30 cm (top) with elbow control mixer.

The tray has 3 anti-runoff edges and 1 rear backsplash of 10 x 20 cm, 1 base in square tube 40 x 40 mm, offset by 70mm with adjustable cylinders and 3-sided dressing skirt, 2 bins from 160cm wide with radiated corners, ribbed drainer, an overflow and drain plug, 1 low shelf full (optional) H-20cm (delivered disassembled with screws).

Made of stainless steel 304

Ref. 5400 Series

Dimensions Several widths of 100, 120, 140, 160, 180 and 200 x Height 85 (+ a backsplash of 10cm) x 2 depths 60 or 70 cm.



DRY BENCH FOR LABORATORY

This bench has a rear backsplash of 100 x 20mm closed at the ends, a peripheral band 3 sides, and 1 base in square tube 40 x 40 mm, offset by 70mm with adjustable stainless steel cylinders anti-slip to screw.

1 full low shelf reinforced with omega Height 200mm (delivered disassembled with screws).

Made of stainless steel 304

Ref. 5300 Series

Dimensions Several widths of 100, 120, 140, 160, 180 and 200 x Height 85 (+ a backsplash of 10cm) x 2 depths 60 or 70 cm.



SIDEBOARD FOR LABORATORY AND AUTOPSY

With 2 trays, made of stainless steel 304, 2 shelves load max 30/40 kg per level, 4 casters including 2 braked galvanized screed with bumper, stainless steel tubes ø25mm, delivered dismantled.

Dimensions L 80 x H 93.5 x W 50 cm – Weight 10 kg

Ref. 3292 Sideboard 2 trays

Variant With 3 trays

Ref. 3293 Sideboard 3 trays



INSTRUMENT SHELF FOR LABORATORY AND AUTOPSY

Made of stainless steel 304 thickness 15/10 °, this instrument shelf is to slide, or to put on the tables (autopsy, dissection, bench, etc ...).

Dimensions L 55 x W 40 x H 25 cm – Weight 5 Kg

Ref. 3265



LABORATORY FURNITURE

BODY SUPPORTS, SET OF 3 UNITS

Made of stainless steel 304, they are placed on all tables Ref.3900, Ref.3300, Ref.3600, Ref. 3610, Ref.3700, Ref.3800, Ref.3810, Ref.3850 and on all types of stretchers. They allow the body to be positioned correctly along the entire length of the table. Sold by 3 (optional: sold by 4 or by 5).

Dimensions L 75 x H 1 x W 10 cm - Weight 3 Kg

Ref. 3270



HEAD SUPPORT WITH HEADREST

Made of stainless steel 304, it can be placed on all tables Réf.3900, Réf.3300, Réf.3600, Réf. 3610, Réf.3700, Réf.3800, Réf.3810, Réf.3850 and on all types of stretchers. It allows the head to be positioned correctly.

Dimensions L 75 x H 18 x W 10 cm - Weight 5Kg

Réf. 3280



VENTILATED CABINET FOR ANATOMICAL PARTS AND SAMPLES IN LABORATORY AND AUTOPSY

Made of stainless steel 304, this cabinet is specially designed for the safe storage of formaldehyde-based products, biocides, or any other solvent-based product.

Composed of a perforated interior chimney and 5 perforated shelves adjustable in height, this cabinet is ventilated from the inside. Its chimney is connected to the air extraction (to be connected to the extraction network) or can be connected to the filtration extraction box (Ref. 502120). The cabinet is stabilized on the floor by 4 feet with adjustable jacks (25mm) to catch up with the floor level. A swing door allows access to storage. The connection of the chimney to the extraction network is made on an elbow of diameter 100mm, located above the cabinet.

Dimensions 1 door 50 x 50 x 180 cm (W x D x H) about 210 in height with chimney flue and legs.

Variants Double swing door 100 x 50 x 180 cm (W x D x H) and key lock, or 2 or 3 sliding doors over the entire height of dimension L 160 x H 196.5 x D 80 cm, capacity 2 or 3 trolleys allowing access to storage.

Option Trolley **Réf. 3290** with space for euro-standard containers 600 x 400 x 78 mm with 16 slides with vertical spacing of 100 mm arranged on the small side, with locking stop on the bottom and non-blocking on the face, 4 handling handles, 4 movable wheels of which 2 with brake and load capacity 100 kg/unit of dimensions : 67,8 x 40 x 180 cm Useful: 60,5 x 40 x 160 cm (W x D x H).

Réf. 5510



VENTILATED TANK FOR ANATOMICAL PARTS IN LABORATORY AND AUTOPSY

Made of stainless steel 316, rectangular tank with slope shape at the bottom of the tank for total emptying on butterfly valve, cooling of the tank by 2 perimeter belts (heat exchange surface 1,4m²) operating pressure 3bars - inlet temperature 8°C

Dress skirt with 4 adjustable legs. U-shaped suction strip on top of tank (height of strip 120mm) and closing cover on top of tank (assisted by 2 stainless steel gas springs) including 3 wire baskets with handles for easy handling. Temperature regulation is ensured by a flow control valve at the outlet of the exchanger.

Sheet metal cladding for EF supply pipes and air extraction ducts. Made of stainless steel 316 grain 220 (external face) and glazed 2B internal faces. Includes a PT 100 probe model IFM TM4599 for the bath.

Dimensions External width 190 cm, rectangular bowl internal dimensions (L x W x D) 178 x 60 x 60 cm / external (H extraction - tray x L x D) 200 - 98 x 190 x 72.5cm

Réf. 5511





TREATMENT OF WASTEWATER



TREATMENT UNIT FOR THE TREATMENT AND NEUTRALIZATION OF WASTEWATER FROM THE MORTUARY OR AUTOPSY DEPARTMENT

The project consists in supplying and installing a treatment unit to treat and neutralize the wastewater from the mortuary service. The process implemented will be chemical under the principle of the action of sodium hydroxide NaOH. All the effluents from the autopsy room and, in principle, from all the points where the liquid discharges are likely to be contaminated, particularly by NCTA, must be treated. These discharges are loaded with organic matter. The inactivation of the NCTA in accordance with the directive of the DGS/DH N° 138 will be carried out in a treatment unit.

The process implemented will be chemical under the principle of the action of sodium hydroxide (NaOH). To ensure the neutralization of effluents and particularly the inactivation of NCTAs, in accordance with the legislation, the contact time will be at least 1 hour at PH 12.2, then neutralization of the chemically active effluent with acid to bring the pH down to between 6.5 and 7.5, so that it can be discharged into the urban network. All effluents from the technical room will be stored during the day in the treatment unit in order to undergo neutralization treatment during the evening.

1) Storage and homogenization tank

In HDPE (High Density Polyethylene), double skin with a volume of 2000 liters equipped with : 1 manhole with cover, 1 effluent inlet port, 1 effluent outlet port, 1 ventilation port equipped with a carbon filter or to be connected to the building's secondary ventilation system. 3 level regulators, 1 agitator, 2 overhead lifting pumps, 1 stainless steel support for pumps and agitator.

2) Treatment tank

HDPE, double-skinned, 2000-liter volume, equipped with : 1 manhole with cover, 1 effluent inlet port, 1 effluent outlet port, 1 ventilation port equipped with a carbon filter or to be connected to the building's secondary ventilation system, 3 level regulators, 1 agitator, 2 overhead lifting pumps, 1 stainless steel support for pumps and agitator, 2 fittings for soda and acid injection, 1 fitting for pH probe.

3) Neutralization unit and acid-base pH regulator:

1 soda metering pump, 1 acid metering pump, 1 pH regulator, 1 pH probe, 1 electrical control cabinet for all equipment, 2 fûts de soude de 20 litres soit 27 kg, 2 réservoirs de rétention.

4) Electrical control cabinet:

Electrical control cabinet for the treatment unit with alarm reporting.

Option Plug and Play installed in a 20 ft container.

Réf. 3800/EU



BOOTS WASHER AND DRYER

ELECTRIC SOLE WASHER

Made of stainless steel 304, equipped with a rotating brush

Including Water inlet 1/2", Water outlet : PVC diameter 50mm, Start-up by push-button, Automatic detergent self-feed, Power supply 230 V mono, Electrical power 0.25 kW, IP 55.

Dimensions (L x W x H) 56 x 65 x 110cm.

Ref. 3800/B0 Packing : By unit with individual box



MANUAL SOLE AND BOOT WASHER

Made of stainless steel 304, equipped with a rotating brush

Including Water inlet 1/2", Water outlet : PVC diameter 50mm, Start-up by pressing pedal, Power supply 230 V mono, Electrical power 0.25 kW, IP 55. Manual release.

Dimensions (L x W x H) 50 x 40 x 30cm.

Réf. 3800/BM Packing : By unit with individual box



MANUAL SOLE AND BOOT WASHER WITH AUTOMATIC DETERGENT MIXING

Made of stainless steel 304, equipped with a rotating brush

Including Water inlet 1/2", Water outlet : PVC diameter 50mm, Start-up by pressing pedal, Power supply 230 V mono, Electrical power 0.25 kW, IP 55. Manual release. Automatic mixing of detergent with water.

Dimensions (L x W x H) 65 x 40 x 50cm.

Réf. 3800/BA Packing : By unit with individual box



ELECTRIC SOLE AND BOOT WASHER

Made of stainless steel 304 in sheet metal thickness 2mm, pickled, passivated, microblasted finish.

Technical specifications 2 motorized vertical brushes Ø 300 mm for cleaning boot uprights, 1 motorized horizontal brush Ø 140 mm with direction of rotation in the direction of the sole grooves for more efficiency, Brush conforms to the FEIBP charter for professional hygiene brushes, FR501 approval.

Includes Support rail, Waste collection basket, Venturi system for detergent dosage, 304 stainless steel electrical box, Installed power 0.60 KW, Supply voltage 400V / 3N~ / 50 Hz. Tri, Control 24 V, Flow rate 6 liters per min, Water operating temperature 50°C max., Water supply 3/8" male, Pressure 3 bars, Outlet Ø 48 mm smooth.

Dimensions (L x W x H) 70 x 55 x 93cm

Options Dosing pump, Wall-mounted canister holder, Retention tray mounting.

Réf. 3800/3B Packing : By unit with individual box



BOOT DRYER

Made of stainless steel 304, to dry the boots after the autopsy, once the boot washer used to wash the soles and boots.

Dimensions (L x W x H) 60 x 60 x 120cm.

Réf. 3800/S Packing : By unit with individual box





LABORATORY SCALES



COMPACT ORGAN SCALE STAINLESS STEEL PAN

This compact stainless steel scale has a weighing capacity from 0 to 6 kg with 1g accuracy, with single or batch weighing functions.

Included 6-digit 19 mm black LCD display, 6-key keypad with tactile effect, IP65 protection, power supply by mains adapter 230 V / 50 Hz, integrated battery DC 6 V / 4,5 Ah with autonomy up to 100 hours

Dimensions (L x W x H) 28 x 32.5 x 10 cm, and tray of 20 x 24 cm – Weight 3,4 Kg

Réf. 910810



COMPLETE ORGAN SCALE STAINLESS STEEL PAN

Complete in stainless steel, it has a range of 0 up to 15 kg with an accuracy of 1g, with single or batch weighing functions.

Included 5-digit 25 mm black LCD display, 8-key keypad with tactile effect, IP65 protection, power supply by mains adapter 230 V / 50 Hz, integrated battery DC 6 V / 4,5 Ah with autonomy up to 80 hours

Dimensions (L x W x H) 28 x 52 x 46 cm, and tray of 34 x 28 cm – Weight 8.7 Kg

Réf. 910820



SUSPENDED ORGAN SCALE STAINLESS STEEL PAN

Perfect for autopsy tables.

Mast-mounted suspended scale with removable stainless steel platform.

The I 05 display is robust, waterproof and easy to maintain thanks to its plastic housing. It is easy to use and very readable. It has a reach from 0 to 20 kg with an accuracy of 5 g. Its keypad is capacitive and backlit.

Dimensions (W x P x H) 131 x 70 x 180mm. Stainless steel tray diameter 25cm

Réf. 910830



COMPACT ORGAN SCALE WITH PLASTIC TRAY

This electronic scale is an economical scale for simple weighing applications. It is made of steel and plastic, and the tray is removable for easy cleaning. It has a range from 0 to 15 kg, with an accuracy of 5 g.

Technical features 6-digit 26 mm black LCD display, 5-key keypad with tactile effect, IP54 protection, power supply by mains adapter 230 V / 50 Hz, integrated battery DC 6 V / 4 Ah with autonomy up to 80 hours

Dimensions (L x W x H) 30 x 11 x 35 cm, and tray of 29 x 22 cm – Weight 4.7 Kg

Réf. 910800

Complies with Directive 89/336/EEC on Electromagnetic Compatibility and Directive 73/23/CCE relating to Low Voltage equipment.

OPTIONS

With **Legal Metrology (/ML)** for all scales except Réf. 910830

With **Bluetooth interface** to control the scale from a PC, smartphone or tablet



MACROSCOPY TABLE

MACROSCOPY TABLE IN SEVERAL WIDTHS

Work plan In stainless steel 316 L - thickness 15/10 and fixed height of 90cm, frame and table cladding 304 L, a worktop of length 90 and width 50cm, with removable dissection trays with holes (air velocity of 0.4 m/s). The table is equipped with a lower ventilated cabinet to ensure clean air and safe work.

Lower part Ventilated cabinet along the entire length of the table, storage space with access to sliding doors, ergonomic return to allow work in a sitting/standing position except at the sink (if option chosen). Access to the technical part (adjustment of registers, plumbing, etc...) with 4 adjustable feet, external siphon, side extraction spigot.

Upper part Front suction plenum along the entire length of the table and over a height of 400 mm, Series double fluorescent lighting 2 x 36 W in hermetic cage. Folding containment in SECURIT 8mm glass and PMMA (movable part) with two opening positions. This enclosure optimally channels the flow of hazardous vapours and protects the operator from any projections.

Dimensions 150 x 75 x 140 cm + return 3 cm (width x length x height) Weight 150 kg approx.

Options

- Stainless steel sink 40 x 34cm
- Fixator recovery system (formalin) with level detector (see photo 1)
- Air extractor ref. 502120/C
Fixator recovery system with level detector and audible alarm (see photo 2)
- Screen to be placed at the sink level,
- IP55 electrical outlets
- All-stainless steel shelf
- Worktop waste garbage can (not perforated worktop) with cover (see photo 3),
- Operation of integration of the sink with optional fixator in the ventilated plan minimum width PV800mm
- Stainless steel storage compartment at the top, bridge fixed on the structure
- Cart for macroscopy table.

Ref. 4810 In width 150 cm

Variants

Ref. 4820 In width 180 cm

Ref. 4830 In width 200 cm




Photo 1



Photo 2



Photo 3

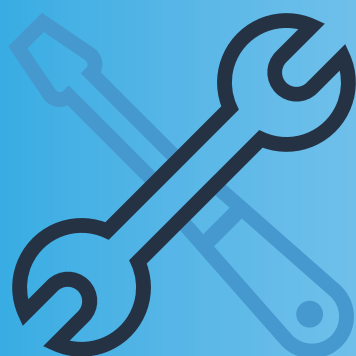


AFTER SALES SERVICE





ELECTROMECHANICAL TROLLEY AND TABLE PARTS



BATTERY

Suitable for 2100/2350 trolleys. (Attention the battery is a consumable so no guarantee).
For safety, always have a battery in advance charged to 100%


Réf. 2350/B Packing : By unit



CONTROL BOX

Suitable for 2100/2350 trolleys. Allows battery charging and trolley elevation

Réf. 2350/C Packing : By unit



EXTERNAL CHARGER

Suitable for 2100/2350 trolleys.

Réf. 2350/A Packing : By unit



EXTERNAL CHARGER AND BATTERY

Allows the battery to be charged while using the trolley by rotating the battery with that of the trolley.
Battery Ref. 2350/B included.

Réf. 2350/O Packing : By unit



WIRED REMOTE CONTROL

Suitable for 2100/2350 trolleys.

Réf. 2350/T Packing : By unit



MOUNTING RAIL FOR CHARGER AND BATTERY

Suitable for 2100/2350 trolleys. To be screwed.

Réf. 2350/S Packing : By unit



JACK FOR DOUBLE CROSS FORKLIFT

Suitable for 2350 trolleys.

Réf. 2350/V Packing : By unit



JACK FOR SINGLE CROSS FORKLIFT

Suitable for 2100 trolleys.

Réf. 2100/V Packing : By unit



CROSS KIT FOR FORKLIFT TRUCK

Trolley repair kit Ref.2350, 2300 or 2260 (4 movable double crosspieces + fastening kit).

Réf. 2350/R Packing : By unit



HYDROELECTRIC TROLLEY AND TABLE PARTS

RAIL KIT FOR HANDLING CART AND FORKLIFT

2 U-rails, 1 with stop and spring-loaded roller lock.

For handling cart 1300/1350 and forklift 2100/2350/2300/2430

Réf. KITRAIL Packing : By kit



BATTERY

Suitable for 2200/2300/2430 trolleys (Attention the battery is a consumable so no guarantee).

Réf. 2300/B Packing : By unit



BATTERY CHARGER

Suitable for 2200/2300/2430 trolleys

Réf. 2300/A Packing : By unit



MINI HYDRAULIC POWER PLANT

Suitable for 2200/2300/2430 trolleys

Réf. 2300/H Packing : By unit



HYDRAULIC OIL

Hydraulic fluid for trolley 2200/2300/2430

Réf. 2300/HU Packing : Bibon 5L



HYDRAULIC CYLINDER

Suitable for 2200/2300/2430 trolleys

Réf. 2300/V Packing : By unit



PEDAL SPRING

Suitable for the hydraulic foot pump of the trolley Ref. 2260.

Serial number and year of manufacture of the trolley to be specified.

Réf. 2260/R Packing : By unit



FOOT PUMP

Suitable for hydraulic forklift Ref. 2260.

Réf. 2260/P Packing : By unit





TROLLEY AND TABLE PARTS



COFFIN HOLDER FOR COOLING CELL

Frame equipped with 5 PVC rolls of diameter 5 Cm. Suitable for Isofroid layouts
To be installed preferably at the lower level of the layout.

Réf. 2311 Packing : By unit



PVC ROLL FOR COFFIN HOLDER

PVC roller, diameter 5cm

Suitable for coffin holders on carts ref. 2310 PVC or for cells ref. 2311

Réf. 2310/R Packing : By unit



EXTENSIBLE EVACUATION HOSE

Pipe extendable from 300 to 600 mm and diameter 32 mm and 40 mm (size to be specified) adaptable to stretcher bungs, Isocart

Réf. 3300/ET Packing : By unit



SWIVEL WHEELS WITH BRAKE

ROUAF75 diameter 75 mm for cooling table,
ROUAF100 diameter 100 mm for trolley and table,
ROUAF125 diameter 125 mm for forklift,
ROUAF150 diameter 150 mm for stretcher trolley,
ROUAF200 diameter 200 mm for stretcher trolley.

Réf. ROUAFX Packing : By pair



SWIVEL WHEELS WITHOUT BRAKE

ROUSF75 diameter 75 mm for cooling table,,
ROUSF100 diameter 100 mm for trolley and table,
ROUSF125 diameter 125 mm for forklift,
ROUSF150 diameter 150 mm for stretcher trolley,
ROUSF200 diameter 200 mm for stretcher trolley.

Réf. ROUSFX Packing : By pair



ROLLERS FOR STRETCHERS

Diameter 80 mm, width 25mm, for all types of stretcher : Ref.1560 or Ref.1561, or Ref.1571.

Réf. GAL80 Packing : By 4



SWIVEL WHEELS ON PLATE WITH BRAKE, DIAMETER 125 MM

Swivel wheels with brakes, 125 mm diameter, mounted on a base plate, for forklift, and obese table Réf. 2430 and 3300/O.

Réf. ROUPAF125 Packing : By pair



SWIVEL WHEELS ON PLATE WITHOUT BRAKE, DIAMETER 125 MM

Swivel wheels without brakes, 125 mm diameter, mounted on a base plate, for forklift, and obese table Réf. 2430 and 3300/O.

Réf. ROUPSF125 Packing : By pair




PIECES CELL AND COMPARTMENT

ABS SUPPORT FOR COOLING TABLE

ABS support (base + body) with drawer for cooling table Réf.1000, Réf.1005.

Réf. 1000/ABS Packing : By kit

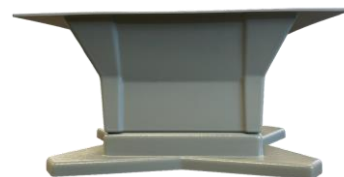

THERMOSTAT FOR COOLING TABLE

For Réf.1000 and Réf.1005.

Réf. 1000/T Packing : By unit



POWER CORD

Power cord 16A 2P+T 3G1 3M for refrigeration table Réf.1000, or Réf.1005.

Réf. 1000/CO Packing : By unit

CONDENSING UNIT FOR COOLING TABLE

For table 1000 and 1005 and Refrigerated ramp 1100 R134A refrigerant fluid

Réf. 1000/C Packing : By unit



COMPLETE HOSE FOR COOLING RAMP

For Réf 1100.

Réf. 1100/H Packing : By unit

POWER PLATE

Power plate for refrigeration unit, ceiling lamp, side, Split. Manufacturer brand Rivacold or Zanotti. Type and serial number to be specified.

Réf. 50000/R Packing : By unit



CONTROL BOARD

Control board for refrigeration unit, ceiling lamp, side, Split. Manufacturer brand Rivacold or Zanotti. Type and serial number to be specified.

Réf. 50000/C Packing : By unit



EVAPORATOR FAN MOTOR

For refrigeration unit, ceiling lamp, side, Split. Manufacturer brand Rivacold or Zanotti.

Serial number and group reference to be specified.

Réf. 50000/ME Packing : By unit



CONDENSER FAN MOTOR

For refrigeration unit, ceiling lamp, side, Split. Manufacturer brand Rivacold or Zanotti.

Serial number and group reference to be specified.

Réf. 50000/MC Packing : By unit



PIECES CELL AND COMPARTMENT



PROPELLER FOR EVAPORATOR

For refrigeration unit, ceiling lamp, side, Split. Serial number and group reference to be specified.

Réf. 50000/HE Packing : By unit

PROPELLER FOR CONDENSER

For refrigeration unit, ceiling lamp, side, Split. Serial number and group reference to be specified.

Réf. 50000/HC Packing : By unit



SET OF TEMPERATURE PROBES

1 for evaporator defrost + 1 for ambient temperature in the cell.

For refrigeration unit, ceiling lamp, side, Split. Serial number and group reference to be specified.

Réf. 50000/T Packing : By unit



COMPRESSOR FOR REFRIGERATION UNIT

For refrigeration unit, ceiling lamp, side, Split. Manufacturer brand Rivacold or Zanotti. Serial number and group reference to be specified.

Réf. 50000/CP Packing : By unit



EVAPORATOR FOR GROUP

For refrigeration unit, ceiling lamp, side, Split. Manufacturer brand Rivacold or Zanotti. Serial number and group reference to be specified.

Réf. 50000/E Packing : By unit



STARTING RELAY FOR GROUP

For refrigeration unit, ceiling lamp, side, Split. Manufacturer brand Rivacold or Zanotti. Serial number and group reference to be specified.

Réf. 50000/RE Packing : By unit



THERMAL RELAY FOR GROUP

For refrigeration unit, ceiling lamp, side, Split. Manufacturer brand Rivacold or Zanotti. Serial number and group reference to be specified.

Réf. 50000/RT Packing : By unit



START CAPACITOR

For refrigeration unit, ceiling lamp, side, Split. Manufacturer brand Rivacold or Zanotti. Serial number and group reference to be specified.

Réf. 50000/CD Packing : By unit



PIECES CELL AND COMPARTMENT

BARE CONTROL BOX

Bare 4-button remote control box

For refrigeration unit, ceiling lamp, side, Split. Manufacturer brand Rivacold or Zanotti.

Réf. 50000/BN Packing : By unit



FACEPLATE FOR COMMAND AND CONTROL BOARD

For refrigeration unit, ceiling lamp, side, Split. Manufacturer brand Rivacold or Zanotti.

Réf. 50000/PL Packing : By unit

CONVERTER FOR BODY TRANSPORT BOX

Converter for body transport refrigeration unit Réf. 4200 L, XL et 2L.

Réf. 4200/CO Packing : By unit



CONVERTER AND GROUP SET FOR BODY TRANSPORT BOX

For Réf. 4200 L, XL and 2L (refrigeration unit in compact ceiling or side unit).

Manufacturer brand Rivacold.

Réf. 4200/GF Packing : By unit



COMPLETE DOOR HANDLE (INCLUDING PUNCH)

For cell door. Photo of part required

Réf. 50000/P Packing : By unit



PUNCH FOR DOOR HANDLE

For cell door. Photo of part required

Réf. 50000/PCP Packing : By unit



LATCH FOR CELL GATE


Latch with lever and striker for cell gate. Manufacturer brand Dagard.

Réf. 50000/L Packing : By unit

CLIP-ON DOOR SEAL

2 lengths of 4.05 meters, for large door or cell gate. Manufacturer brand Dagard.

Réf. 50000/J Packing : By unit





PIECES CELL AND COMPARTMENT



ADHESIVE LABEL (5 LINES) FOR BODY IDENTIFICATION

Adhesive label (5 lines) for identifying bodies and rewriteable to be placed on cell door

Réf. 50000/ET Packing : By unit

ADHESIVE LABEL HOLDER

Adhesive label holder for individual label (1 line) for identification of bodies and reusable to be placed on cell door.

Réf. 50000/PE Packing : By unit



RAIL SUPPORT FOR CELL LAYOUT

To be specified: the section of the layout and the width of the door passage.


Réf. 50000/EQ Packing : By unit



STRAIGHT SLIDING BLOCK FOR INTERIOR FITTINGS

Straight sliding block for interior fittings, includes screws to be fixed on the U1 rail (screws M 4 x 16 + nut M4). U1 is the one with the rear stop, and is positioned on the right side of the layout.

Réf. 50000/BL Packing : By unit with individual box



RAIL KIT FOR INTERIOR FITTINGS TO ADD A LEVEL

It includes 2 U rails + 4 rail supports + screws.

Please specify the dimensions of the supports for your indoor gantry :

- either rectangular tube diam. 40 x 27 mm
- or square tube 30 x30 mm

Doorway width: 620 or 800 or 1000 mm

Réf. KITRAIL/CEL Packing : By Kit with individual box



PAIR OF GAS COMPASSES FOR BODY TRANSPORT BOX

For Réf. 4200 L, XL and 2L Manufacturer brand Isofroid.

Box reference and year of manufacture to be specified.

Réf. 4200/C Packing : By pair with individual box



PAIR OF STRAP FOR STRETCHER TROLLEY

Suitable for Ref. 4400/50, and 4400/60 Manufacturer brand Isofroid.

Réf. 4200/S Packing : By pair with individual box



CLOSING THE TAILGATE OF THE BODY TRANSPORTER

Suitable for Ref. 4200 L, XL and 2L. Manufacturer brand Isofroid.

Réf. 4200/H Packing : By unit with individual box

STRETCHER TROLLEY / COFFIN LOCK FOR BODY TRANSPORT BOX

Includes guide rail and adjustable stop.

Suitable for Ref. 4200 L, XL and 2L boxes. Manufacturer brand Isofroid.

Réf. 4200/B Packing : By unit with individual box



TABLE AND TRAY PARTS

MIXER TAP WITH ELBOW CONTROL

Ref. 3000/M Packing : By unit with individual box



COMPLETE SHOWERHEAD ON COLD WATER

Includes basin washer and its support + flexible length 3 meters

For autopsy table Ref. 3610, 3700, 3800, 3810

For washing tray Ref. 3250, 3550, 3500, 3980.

Réf. 3000/D Packing : By unit with individual box



SHOWER ONLY ON COLD WATER

Includes basin washer and its support

For autopsy table Réf. 3610, 3700, 3800, 3810

For washing tray Réf. 3250, 3550, 3500, 3980.

Réf. 3000/DO Packing : By unit with individual box



SHOWER HOSE

Food-grade reinforced PVC pipe

Réf. 3000/F length 3 meters for washing tray Réf. 3250, 3550, 3500, 3980.

Réf. 3000/F4 length 4 meters for autopsy table Réf. 3610, 3700, 3800, 3810



COLD WATER TAP FOR HAND SHOWER OR PERMANENT RINSE

For autopsy table Réf. 3610, 3700, 3800, 3810

For washing tray Réf. 3250, 3550, 3500, 3980.

Réf. 3000/R Packing : By unit with individual box



FAUCET WITH HYDRO-VACUUM

Installs on autopsy tables Réf. 3610, 3700, 3800, 3810 3850

For washing tray Réf. 3550, 3500, 3980.

Réf.3000/H Packing : By unit with individual box



WATERPROOF ELECTRICAL SOCKET 230V/50HZ PROTECTION IP55

Waterproof electrical socket 230V/50HZ protection IP55

For autopsy table Réf. 3610, 3700, 3800, 3810

For washing tray Réf. 3250, 3550, 3500, 3980.

Réf. 3000/PE Packing : By unit with individual box





TABLE AND TROLLEY PARTS



COLUMN FOR TABLES AND TROLLEYS WITH VARIABLE HEIGHT

Suitable for Réf. 3750, 3850, 3800, 3810, 3630 ; 3631 ; 3632

Table reference and year of production to be specified

Réf. 3000/V Packing : By unit



CONTROL UNIT FOR VARIABLE-HEIGHT

TABLE AND CARTS

Control box for variable height table and carts, sold individually

For autopsy table Réf. 3750, 3850, 3800, 3810.

Table or trolley reference and year of production to be specified

Réf. 3000/C Packing : By unit



ELEVATION COMMAND FOR AUTOPSY TABLE

For autopsy table Réf. 3750, 3850, 3800, 3810.

Table reference and year of production to be specified

Réf. 3000/T Packing : By unit



WIRED CONTROL FOR ISOCART TROLLEY

Allows lifting and/or tilting of the trolley

Réf. 3630/T2 Model 2 keys for trolley ref 3630

Réf. 3630/T4 Model 4 keys for trolley réf 3631 ; 3632



BATTERY FOR ISOCART TROLLEYS

Suitable for 3630 ; 3631 ; 3632 trolleys. (Attention the battery is a consumable so no guarantee).

Réf. 3630/B Packing : By unit



BATTERY CHARGER

Suitable for charging the batteries of Isocart 3630 ; 3631 ; 3632 trolleys

Réf. 3630/O Packing : By unit



MISCELLANEOUS AND EQUIPMENT RENTAL

MILL DILACERATOR

For autopsy table Réf. 3610, 3700, 3800, 3810

For washing tray Réf. 3250, 3550, 3500, 3980.

Réf. 3800/B Packing : By unit



KEY LOCK FOR FURNITURE AND BENCH

Key lock for furniture and bench Ref. 5100, 5200, 3940.

Key lock for storage bench Ref.3000/CL

Key lock for storage cabinets Ref.5100/C

Réf. 5100/C Packing : By unit



BUNG WITH INTEGRATED BASKET

For washing tray 3550, 3500

Réf. 3800/SB Packing : By unit



BUNG FOR STRETCHER

For Ref.1560, Ref.1561 and Ref.1571 in 1 1/4 inches. Manufacturer brand Isofroid.

Réf. 1561/B Packing : By unit



CELL RENTAL 6 TO 8 BODIES

6-body conservation cell for positive cold temperature :

- -5°C to +5°C
- Panels thickness 60 mm
- 2 free passage doors (H x W) 182 x 80 cm with 180° opening on the left or right
- With a side-mounted or ceiling mounted refrigeration unit
- Air condensation
- Hermetic compressor
- Fan on condenser
- Refrigerating capacity 1352W at 0°C for a maximum ambient T° of + 40°C,
- Gas R404A
- Automatic hot gas defrost
- Power supply 230V / 1~ / 50Hz / IP66 protection.

Dimensions (W x H x D) 212 x 212 x 218cm (+28 for the group in width),

Including 2 pairs of fittings and 6 stainless steel stretchers 304.

Ref. 50682/LOC Packing: By kit



EIHF - Isofroid

N°66 Z.A La Noyeraie
69490 Sarcey - France

Tel: +33 4 74 26 87 24

Fax: +33 4 74 26 87 26

contact@eihf-isofroid.com

<https://www.eihf-isofroid.eu/>



isofroid 